
Review Article: Magnetic Electrostatic Plasma Confinement

By Thomas James Dolan, Idaho National Engineering Laboratory, EG&G Idaho, PO Box 1625, Idaho Falls, ID 83415-3880, USA

Author contact information as of April 2009: University of Illinois, Department of Nuclear, Plasma, and Radiological Engineering, 100G Talbot Lab, MC-234, 104 South Wright Street, Urbana, IL 61801.
dolantj@illinois.edu, (217) 244-7257

This work was supported in part by the US Department of Energy, Office of Energy Research, contract DOE-AC07-76ID01570.

Abstract

Electrostatic plasma confinement and magnetic electrostatic plasma confinement (MEPC) have been studied for four decades. The multiple potential well hypothesis, postulated to explain high neutron yields from Hirsch's colliding beam experiment, has been supported by several pieces of evidence, but results were inconclusive. Magnetic shielding of the grid was developed to reduce the required beam current and to prevent grid overheating. Electrostatic plugging of magnetic cusps evolved to a similar configuration. Due to low budgets, early MEPC experiments used spindle cusps, which are poor for plasma confinement. Later experiments used multipole cusps or a linear set of ring cusps, which have larger volumes of field-free plasma. To keep the self-shielding voltage drop $\Delta\Phi \leq 100$ kV, the electron density n_s in the anode gap should be less than about 10^{19}m^{-3} . The central plasma density can be an order of magnitude higher. The ATOLL toroidal quadrupole had anomalous electron energy transport, but the Jupiter-2M linear set of ring cusps achieved a transport rate about a factor of two above the classical rate. With near-classical transport, a power gain ratio $Q \approx 10$ is predicted for a reactor with $r_p = 3$ m, $B = 6$ T, and applied voltage $\Phi_A = 400$ kV. Besides producing electricity and synthetic fuels, MEPC reactors could be used for heavy ion beams sources and neutron generators. The main issues of concern for MEPC reactor development are electron transport, plasma purity and electrode alignment and voltage holding.

List of Parameters

(SI Units are used, unless otherwise noted.)

a	= half-width of the anode gap
A	= area
A_{loss}	= effective area for plasma loss out of magnetic cusps
A	= magnitude of the magnetic vector potential
B	= magnetic field (magnetic induction)
B_a	= magnetic field in the anode gap
B_b	= $[2\mu_0 nk(T_e + T_i)]^{1/2}$ = boundary magnetic field
B_e	= peak magnetic field at the coil
B_z	= point cusp magnetic field
c	= speed of light
c_s	= ion acoustic speed
d	= grid wire diameter
D_a	= electron diffusion coefficient due to collisions with neutral atoms
D_{ei}	= electron diffusion coefficient due to collisions with ions
D_{max}	= maximum diffusion coefficient
D_o	= total collisional diffusion coefficient
e	= electronic charge
f_i	= fraction of incident neutrals which are ionized (instead of charge exchanged)
$f_{\alpha e}$	= fraction of fusion product alpha energy W'' , transferred to electrons
$f_{\alpha i}$	= fraction of fusion product alpha energy W'' , transferred to ions
F	= geometrical factor having dimensions of reciprocal length
g	= spacing between grid wire centers

b	= width of the anode along the magnetic field direction	r_o	= virtual electrode radius (electrostatic confinement and Penning trap)
I	= electron current from electrodes into the plasma	r_o	= radius of plasma boundary surface in point cusp
I_{diff}	= electron diffusion current	r_p	= approximate plasma radius at magnetic field boundary
I_e	= electron injection current	R	= accelerating grid radius (electrostatic confinement)
k	= wave number = $2\pi/\lambda$	R	= magnetic mirror ratio
k	= Boltzmann constant	R	= ring cusp anode radius
k	= subscript denoting either electrons or ions	S	= plasma surface area
L	= length between ends of a linear cusp device	S_i	= ionization source
L_I	= distance between adjacent ring cusps	S_m	= volume-averaged neutral input rate
m_e	= electron mass	T_{ek}	= electron temperature (keV)
m	= number of pairs of multipole conductors = $N/2$	T_e	= electron temperature
M	= ion mass	T_{eo}	= central electron temperature
n_e	= plasma electron density	u	= ion speed
n_a	= uncompensated electron density at centre of anode gap	u_{ia}	= ion speed in anode gap
n_B	= Brillouin density	v	= electron velocity
n_k	= particle density of species k	$v_{\nabla n_e}$	= electron density-gradient drift velocity
n_c	= central core electron density	V	= plasma volume
N_e	= total number of electrons	w	= characteristic half-width of the electron distribution in anode region
n_o	= central plasma density	W_a	= average energy acquired along the slope of the potential well by ions
n_o	= initial plasma density (pulsed electrostatic confinement)	W_e	= electron energy
n_{ia}	= ion density in the anode gap	W_i	= ion energy
n_L	= trapped cold electron density in anode region	W_{loss}	= average electron energy loss per incident neutral atom due to ionization
N	= number of multipole cusp gaps	W_{\perp}	= ion energy perpendicular to the radial direction
p	= $(\tau_{\perp}/\tau_{\parallel})^{1/2}$	x	= r/R
P_E	= electron heating by the edge electric field that affects the central plasma it = ion heating by plasma waves	y	= Φ_i/T_e
P_{rad}	= radiative power loss	y_k	= $z_k e \Phi_k/T_k$
P_w	= electron power loss to plasma waves	Y	= $2\pi R/N$
P_o	= canonical angular momentum	Z_k	= charge number
Q	= (fusion power)/(input power)	Z_k	= 1 for electrons and 1/2 for ions
q	= $\omega_{pe}^2/\omega_{ce}^2$	α	= a parameter depending on T_i/T_e
r	= radius	Υ	= fraction of current intercepted by the grid
r_a	= point cusp anode radius		
r_b	= plasma boundary radius		

δ	= the effective half-width of the cusp gap for plasma loss	τ_i	= ion confinement time
δ	= a function, of Ph P2	τ_o	= electron collision time
$\Delta\Phi$	= self-shielding voltage drop in anode gap	τ_{trap}	= time for central plasma free electrons to be trapped by edge magnetic field
Δr	= thickness of plasma edge region	Φ_A	= applied voltage
ε	= (trapped electron pump-out rate)/ (diffusion rate)	Φ_k	= potential barrier for electrons or ions
ε	= effective open fraction of wire mesh grid	Φ_e	= electron potential barrier
ε_ε	= geometrical open fraction of wire mesh grid	Φ_i	= ion potential barrier
ε_o	= permittivity of free space	Φ_p	= plasma potential = $\Phi_i + \Delta\Phi$
ζ	= global Brillouin ratio	ω_c	= cyclotron frequency
$\ln \Lambda$	= Coulomb logarithm	ω_{ce}	= electron cyclotron frequency
λ	= wavelength	ω_{ci}	= ion cyclotron frequency
μ_o	= permeability of free space	ω_{pe}	= electron plasma frequency
ν_{ei}	= electron-ion momentum-transfer collision frequency		
ρ_a	= electron Larmor radius in anode gap		
ρ_b	= electron Larmor radius at plasma boundary		
ρ_e	= electron Larmor radius		
ρ_o	= electron Larmor radius in point cusp		
ρ_i	= ion Larmor radius		
ρ_I	= inner electron turning radius		
ρ_2	= outer electron turning radius		
$\langle\sigma^*v\rangle$	= DT fusion reaction rate parameter		
τ_\perp	= electron loss time by diffusion across the magnetic field		
τ	= pulse length		
τ_k	= characteristic collision time for electrons or ions		
τ_{cond}	= time for heat loss by conduction		
τ_{diff}	= characteristic time for electron diffusion across the magnetic field		
τ_e	= electron lifetime or confinement time		
$\tau_{E\perp}$	= electron perpendicular energy confinement time		
$\tau_{E\parallel}$	= electron parallel energy confinement time		
τ_{ei}	= electron-ion collision time		
τ_{eq}	= electron-ion equipartition time		

I. Introduction

Magnetic electrostatic plasma confinement (MEPC) uses electrostatic fields to enhance plasma confinement by open magnetic fields. The purpose of this review is to describe:

- (i) the evolution of MEPC from electrostatic plasma confinement and from open magnetic confinement systems
- (ii) MEPC theory
- (iii) experimental observations
- (iv) fusion reactor concepts
- (v) salient issues

MEPC devices have also been called ‘electromagnetic traps’, ‘magneto-electrostatic traps’, ‘magnetic inertial-electrostatic confinement’, ‘electrostatically plugged cusps’, ‘kinetic-electric-magnetic plasma confinement (KEMP)’, ‘electric-magnetic confinement’, ‘Polywell’ and ‘modified Penning trap.’ Discussions of electrostatic field applications in tandem mirrors, bumpy tori and tokamak helicity injection are beyond the scope of this review.

1.1 Electrostatic Plasma Confinement

1.1.1 Virtual Electrode Formation

Lavrent’ev¹ first proposed electrostatic plasma confinement on 22 June 1950, and magnetic field enhancement of electrostatic plasma confinement in March 1951. In the early 1960s Farnsworth² proposed electrostatic plasma confinement for the production of fusion reactions, based upon his experience with spherical multipactor vacuum tubes. Lavrent’ev³ developed a theory of charged particle flow and focusing in plane and spherical geometries. Budker⁴ calculated the fusion reaction rate that could be attained by trapping ions in the negative electrostatic charge of an electron beam. Early electrostatic plasma confinement experiments⁵ consisted of concentric spherical wire mesh electrodes, which accelerated charged particles inwards to produce a virtual electrode inside the central sphere (Figure 1). Charged particles of the opposite sign would be attracted into the virtual electrode. For example, if electrons were injected into the sphere, they would produce a virtual cathode⁶, which would attract positive ions. In order to minimize grid current and heating, it is desirable to have the grid mesh nearly transparent to the charged particle flows.

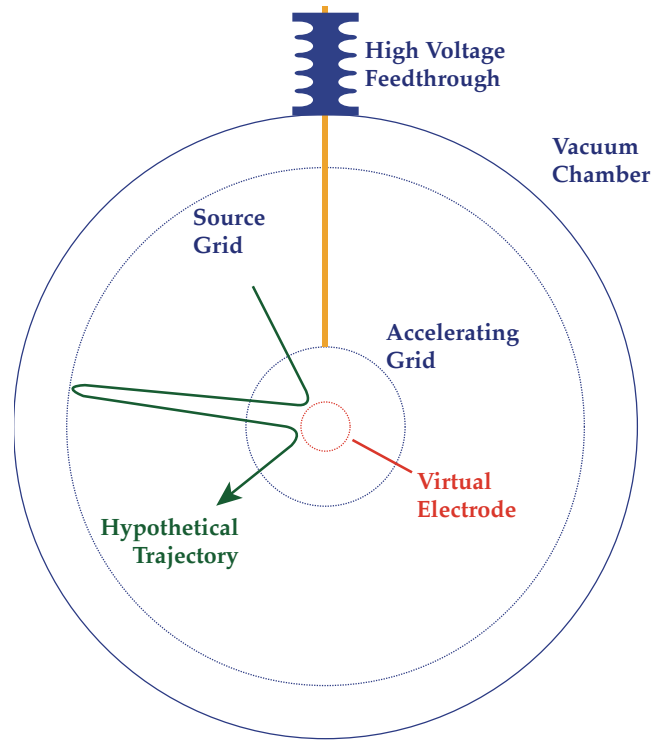


Figure 1 — Concentric spherical electrodes used for electrostatic plasma confinement.

Deflections of injected particles towards nearby grid wires decrease the effective open area of the grid by an amount⁷

$$\frac{\mathcal{E}}{\mathcal{E}_g} = \left(1 - \frac{1}{16\pi\epsilon_g^{1/2}}\right)^2 \quad (1)$$

where ϵ is the effective open fraction of the grid, $\epsilon_g = (g - d)^2/g^2$ is the geometrical open fraction of the grid, g is the spacing between grid wire centers (square mesh) and d is the grid wire diameter. For example, if $g = 4$ mm and $d = 0.2$ mm, then $\epsilon_g = 0.90$ and $\epsilon = 0.865$. The circulating current I_c is related to the current I intercepted by the grid wires by the equation:

$$\frac{I_c}{I} = \frac{2\epsilon}{(1 - \epsilon^2)} \quad (2)$$

For the example case with $\epsilon = 0.865$, the theoretical value of $I_c/I = 6.9$. Thus, for a highly open grid the circulating current can be about an order of magnitude greater than the grid current.

Lavrent’ev and co-workers⁸ studied ion generation by oscillating electrons and ion focusing with spherical grids. Probe measurements inside a 5 cm radius spherical cathode indicated a strong focusing of injected ions down to radii < 1 cm. The focused ion current density was 12–25 mA cm⁻² at 4 kV in 0.13 Pa of argon.^{9,10,11} A passing ion density of 10¹⁷ m⁻³ was deduced from current probe data.¹²

Hirsch¹³ injected electrons into a spherical wire mesh anode, and used an electron beam probe to measure the potential well depth produced by the virtual cathode. He found that deep, negative potential wells were easily produced and maintained. He also observed some oscillations of the discharge at frequencies ~ 100 MHz.

For the case of *electron injection*, to produce a virtual cathode, there are two great difficulties: the very high currents required¹⁴ and grid wire overheating. Better confinement could be obtained for the case of ion injection into the accelerating grid, producing a virtual anode.

Rockney¹⁵ simulated the formation of a virtual electrode in cylindrical geometry by solving Poisson's equation for a case with only ions, represented by 2000 charged rods, and showed that the virtual electrode is stable for long periods of time. In a simulation with both electrons and ions, however, Barnes¹⁶ found that electrons trapped in the virtual anode tend to wash out the anode potential, so that the virtual anode gradually disappears. Only in cases with very high ion currents did the virtual anode persist. He concluded that the electrostatic-inertial confinement device, as originally conceived, was unlikely to confine a fusion plasma adequately. Porter and Kle-vans¹⁷ investigated the stability of electrons flowing among ions within a virtual anode, and concluded that the electrons are marginally stable to the two-stream instability.

1.1.2 Multiple Well Hypothesis

Hirsch¹⁸ observed high DT neutron yields (up to 2×10^{10} s⁻¹) from a steady-state device using ion injection from six ion guns. These neutron yields exceeded the predictions of simple theories. One hypothesis to account for the observed neutron yields is the formation of multiple, concentric spherical potential wells of alternate sign inside the central sphere, with much higher circulating currents in the inside layers, as illustrated in Figure 2. According to such a model, ions trapped in interior layers could have high energies, circulating currents and densities, and could produce significant fusion energy yields. Hu and Klevans¹⁹ modeled multiple wells for cases with zero angular momentum (perfectly radial motion). They calculated the attainable current amplification ratio (the ion current inside virtual anode/ion beam current outside virtual anode), and found that values as high as 150 were possible if large trapped ion populations could be confined in the outer region.

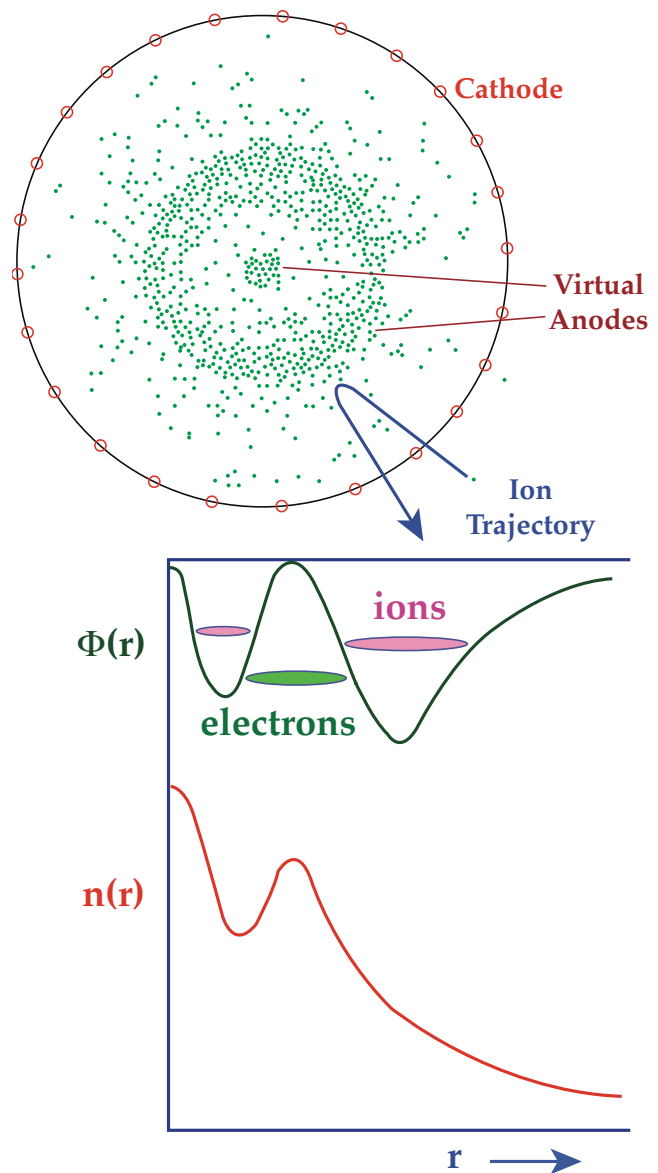


Figure 2 — Multiple virtual electrodes inside the accelerating grid

The following observations appear to be consistent with the *multiple potential well hypothesis*:

- (i) High neutron yield;
- (ii) Peaks in the curve of neutron yield versus radius measured by Hirsch¹⁸ as shown in Figure 3;

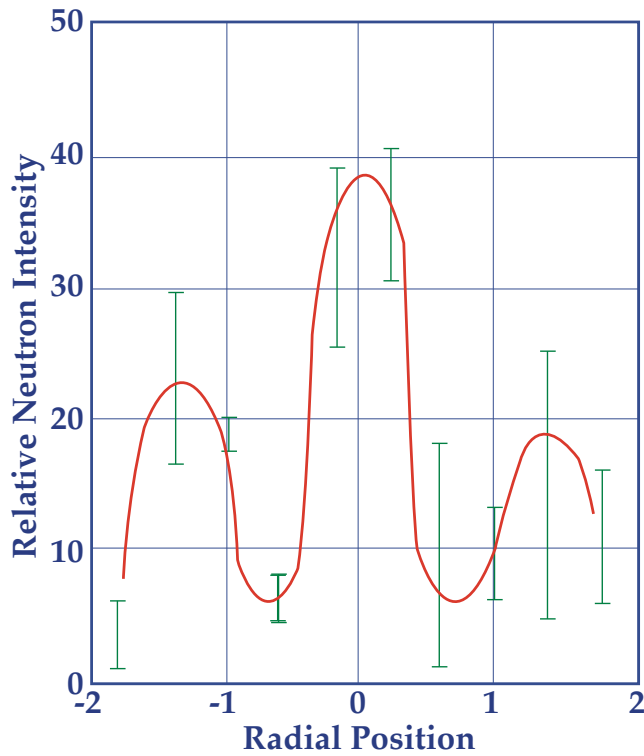


Figure 3 — The results of a neutron collimation study at -90kV, 20 mA and $p = 1$ Pa (deuterium)¹⁸

- (iii) Peaks in the curve of electron bremsstrahlung yield versus radius measured by Hirsch¹⁸ as shown in Figure 4;

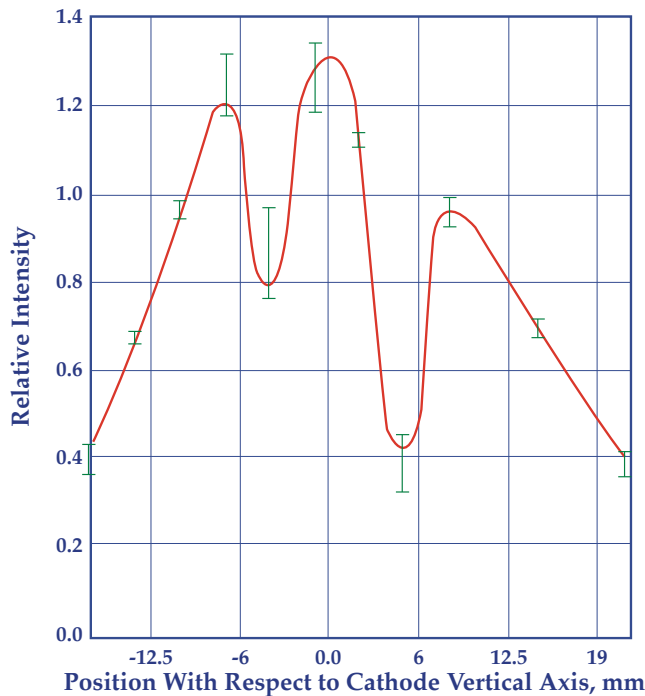


Figure 4 — Electron bremsstrahlung yield versus radial position, as measured by Hirsch¹⁸.

- (iv) A large time-delayed puff of gas after beam injection cut-off measured by Hirsch¹⁸;
- (v) Theoretical studies by Cherrington *et al*²⁰ for cases with injected beams having narrow spreads of energy and angular momentum show a slight double well, as illustrated in Figure 5;

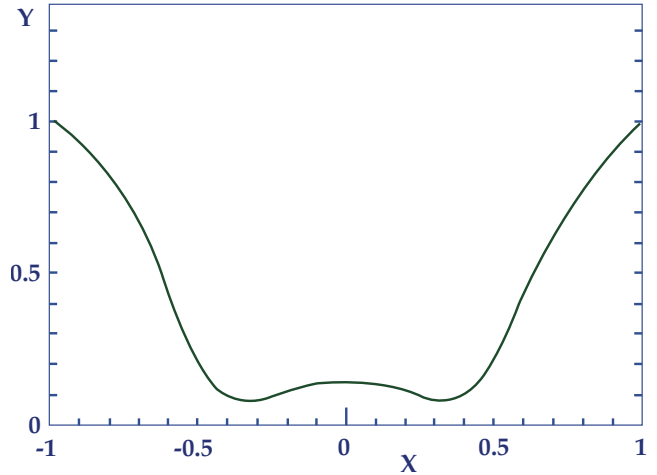


Figure 5 — Theoretical variation of dimensionless electrostatic potential Y versus dimensionless radius X , for a case with applied voltage = 500 V, current = 125 mA, grid transparency = 90%, and very small spreads of energy and angular momentum. A double well is apparent.

- (vi) Electron beam probe studies by Swanson *et al*^{21,22} of a spherical electrostatic confinement device at low pressures;
- (vii) Peaks in the curve of electron density versus radius (Figure 6) measured by laser heterodyne studies in a cylindrical electrostatic confinement device by Meeker and co-workers.^{23,24} This figure is for the case of electron injection; similar, less pronounced peaks were observed during ion injection.

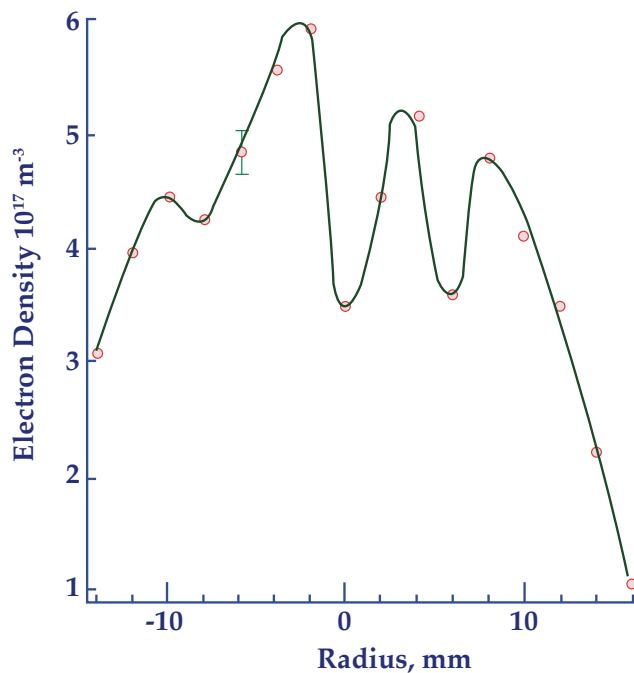


Figure 6 — Electron density versus radius measured by Meeker *et al* using a laser heterodyne interferometer during electron injection into a cylindrical grid with radius 40 mm, at 16A circulating current, $p = 1$ Pa (deuterium)²⁴.

Other studies, however, have yielded results less indicative of multiple potential wells. Imel²⁵ and Black and Klevans²⁶ developed theoretical models of the electrostatic potential profile and electron and ion density profiles, using distribution functions tailored to various experimental conditions. They analyzed three cases²⁷

- (i) Ion beam injection at very low pressures (the Hirsch experiment). They concluded that multiple deep potential wells would probably not form under the conditions of the Hirsch experiment.
- (ii) Ion injection at higher pressures, where charge exchange produces a broad spread of ion energies (several experiments). They predicted a central plasma density close to the value measured in the Penn State experiment ($2 \times 10^{15} \text{ m}^{-3}$), and found that substantial potential wells could be formed for $p < 0.13$ Pa (1 mTorr).
- (iii) Electron injection at low pressures (the Swanson *et al* and Black and Robinson experiments). They predicted deep potential wells for high perveance cases, as observed by Swanson *et al*, and shallow potential wells for low perveance cases, as observed by Black and Robinson.²⁸

They did not report any cases with finite angular momentum and multiple potential wells.

Gardner and colleagues²⁹ continued the ion beam experiment of Hirsch and used a microwave cavity to measure the number of free electrons in the plasma, but

they were unable to reproduce the neutron yields observed by Hirsch. Baxter and Stewart³⁰ predicted neutron yields close to those observed in the Hirsch experiment by analyzing ionization and charge exchange in the ion beam, without invoking the multiple potential well hypothesis.

Peterson and Oleson³¹ studied hemispherical focusing of a low-energy ion beam in a double-beam plasma device. When the ion beam energy exceeded T_e the beam ions were slowed down by a potential hill (virtual anode) at the focus. They observed formation of a dense group of cold electrons (0.8 eV), which appeared to ride along with the ion beam, in addition to the background plasma electrons (4.5 eV) and primary electrons from filaments. Such cold electrons could tend to wash out potential wells.

Nadler *et al*³² built a collimated solid state proton detector to observe protons resulting from DD fusion reactions in a spherical electrostatic confinement device. The energy shifts produced by aluminum and lead foils verified that they were detecting 3 MeV protons. At 12 mA cathode current, 30 kV voltage, in 0.5 Pa of deuterium fusion reactions between the focused ion beam and the background plasma were dominant. In future experiments at higher currents, the higher proton count rates should permit improved angular resolution, which could facilitate the detection of multiple potential wells.

1.1.3 Regimes of Operation

Miley *et al*³³ distinguished three regimes of ion injection into an inertial electrostatic confinement (IEC) device:

- (1) **A discharge mode.** In this mode a self-sustaining plasma discharge (like a glow discharge) generates ions throughout the chamber volume. Free electrons are produced by ionization and by secondary emission from grids. This mode requires comparatively high gas pressures (>1 Pa), which result in substantial charge exchange rates.
- (2) **An emitter mode,** based on a patent by Hirsch and Meeks.³⁴ In this mode primary electrons from thermionic cathodes orbit in and out of an intermediate grid, ionizing background gas, at pressures typically 0.1–1 Pa. Ions produced by ionization are then accelerated into the central cathode. This mode was used in experiments by Meeker and co-workers^{24,35} to measure density profiles. Using this mode with deuterium gas, Miley *et al*³³ observed steady-state neutron yields of 10^5 neutrons per second.
- (3) **A beam injection mode.** High-energy ion beams are focused into the central region, to produce a high-density virtual anode. This

mode, which can operate at the lowest pressures, was used by Hirsch to obtain high neutron yields. This mode is most suitable for fusion reactors, because the low pressure minimizes ion energy loss by charge exchange.

1.1.4 Reactor Prospects

For *steady state* operation with radiative cooling of a tungsten grid intercepting 1% of the ion current and focusing the ions to a virtual anode at radius $r_0 = 0.01 R$, Lavrent'ev³⁶ found that a grid radius $R > 10$ m would be needed in order to achieve a net energy output. For the case of a pulsed reactor the required grid radius is given by

$$R > 0.001 \gamma \tau_p \phi_A^3 \left(\frac{r_0}{R} \right) / 4d \quad (3)$$

where γ is the fraction of current intercepted by the grid, τ_p is the pulse length, d is the grid wire diameter and Φ_A is the applied voltage (kV). For a case_ with $\gamma = 0.01$, $r_0/R = 0.01$, $\Phi_A = 100$ kV, $\tau_p = 0.1$ and $d = 0.001$ m, this equation gives $R > 2.5$ m.

It is also possible to focus the injected ions temporally by increasing the voltage during injection.³⁷ Ions starting out later are accelerated more and catch up with the early ions, so that the ion density at the focus is much higher than the steady-state value for continuous injection. For example, starting with background plasma at radii between $R = 1$ m and 2 m with density $n_0 = 10^{18} \text{ m}^{-3}$, the focused density would be $n = 6 \times 10^{25} \text{ m}^{-3}$. The converging ion beams could also be used to compress and ignite inertial confinement fusion target pellets.

Although purely electrostatic plasma confinement might be attractive for a fusion reactor with a large radius or short pulse length, overheating of the grid wires is a serious concern. One way to reduce the heat load from charged particle bombardment of the grid wires is to shield them magnetically by passing high currents through them, as illustrated in Figure 7. If electrons are injected between the grid wires, very few will contact the grid wires directly. Some electrons will gradually become trapped in the magnetic field and diffuse to the grid wires, but this process is orders of magnitude slower than direct bombardment. This magnetic shielding of grid wires, here called MEPC, has also evolved from open magnetic confinement systems.

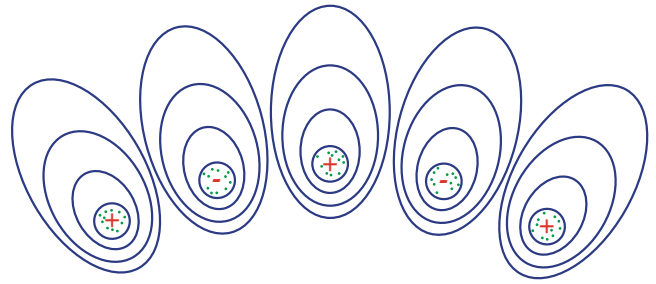


Figure 7 — Cutaway view of a few grid wires with currents flowing out (+) and into (-) the plane of the drawing. The ellipses represent magnetic field lines.

1.2 Open Magnetic Confinement Systems

Minimum- B magnetic confinement systems offer good MHD stability, but suffer from rapid plasma loss along magnetic field lines.³⁸ Confinement times in simple magnetic mirror cells are typically of the order of ion-ion scattering times, and confinement times in magnetic cusps are tens of transit times, which typically makes

$$Q \equiv \frac{(\text{fusion power})}{(\text{input power})} \leq 1 \quad (4)$$

for ordinary mirrors and cusps. In order to attain $Q > 10$ without requiring very large size or extremely high magnetic induction, it is desirable to find a means for plugging end losses from magnetic mirrors and cusps. Many means of Q -enhancement for open magnetic confinement systems have been studied, including tandem mirrors, multiple mirrors, field reversed mirrors, Tormac, Surmac, plasma rotation, gas dynamic traps, radio frequency plugging and electrostatic plugging.^{39,40} Axisymmetric cusps have been suggested as electrostatic end plugs for tandem mirrors.^{41,42,43}

Several cusped magnetic fields have been considered for plasma confinement,⁴⁴ as illustrated in Figure 8. The toroidal multipole shown in Figure 8 has $N = 6$ cusps (hexapole). In addition to these configurations, arrays of point cusps on the surfaces of polyhedrons have been studied by Keller and Jones⁴⁵ and by Sadowski.^{46,47,48,49,50} All of these cusp geometries have been considered for electrostatically plugged devices.

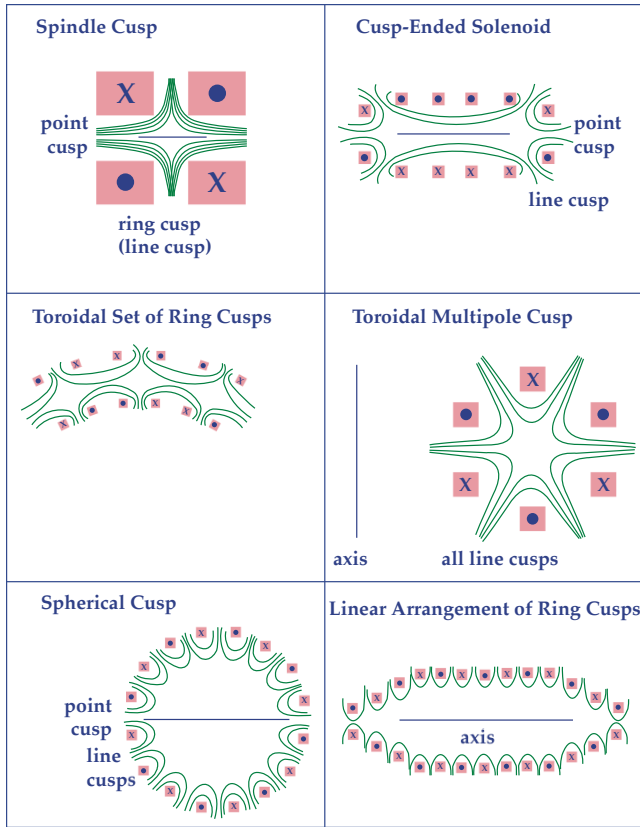


Figure 8 — Magnetic field lines (smooth curves) in some cusped geometries. The symbols x and o represent current into and out of the drawing, respectively.

For plasma confinement by magnetic cusp fields, the loss area through a ring cusp is approximately $2\pi R(2\delta)$, where R is the ring cusp radius and δ the effective half-width of the cusp gap through which plasma is lost. In a spindle cusp, the loss area through the point cusps is comparable, so the total loss area $A_{loss} = 8\pi R\delta$. The ion flux into the loss regions is approximately $0.25nu$, where u is the ion speed, so the confinement time in an unplugged magnetic spindle cusp device is approximately

$$\tau \approx \frac{nV}{0.25nuA_{loss}} = \frac{V}{2\pi uR\delta} \quad (5)$$

where V is the plasma volume. This time is typically tens of bounce times back and forth inside the central field-free region. Spindle cusps have very small plasma volumes. If $\delta \sim p_i$ then unfeasible large R and B would be required for a reactor. If $\delta \sim (p_e p_i)^{1/2}$ (a hybrid gyro-radius), as indicated in some cusp experiments and in a computer simulation,^{51,52,53} then a reactor using a ‘picket fence’ cusp (such as the spherical cusp and linear set of ring cusps in Figure 8) is feasible, but high magnetic fields and large radii are needed.⁵⁴

For a linear set of ring cusps (Figure 8) with distance L_i between the ring cusps, the plasma volume between

cusps is $V = \pi r_p^2 L_i$ where r_p is the effective plasma radius, and the loss area $A_{loss} \approx 4\pi R\delta$. For this case

$$\tau = \frac{r_p^2 L_i}{uR\delta} \quad (6)$$

This equation, which estimates the plasma loss time by free-flow-out ring cusps with an effective loss width 2δ in each ring cusp, will be used later to estimate the effectiveness of electrostatic plugging.

Lavrent’ev and colleagues^{55,55} proposed electrostatic plugging of cusps to reduce the loss rate of plasma flowing along magnetic field lines out of the cusp gaps, and conducted early experimental studies of this technique. If the plasma potential is highly negative relative to the walls, the ions will be confined electrostatically. Only electrons will be energetically able to pass through the narrow cusp gaps (plus a few ions in the high-energy tail of the Maxwellian), so the width of the untrapped electron stream flowing through the cusp gap may be reduced to $\delta \sim p_e$. Cathodes outside the cusp gap reflect escaping electrons back into the plasma. Such electrostatically plugged cusps are equivalent to magnetic shielding of the grid wires of an electrostatic-inertial confinement device. In electrostatically plugged cusps, the ions no longer flow freely out of orifices, so the free-flow confinement time estimates do not apply. Instead, the ions are confined electrostatically by the potential well of electron space charge, and electron confinement is limited by diffusion across the magnetic field.

Moir discussed the use of electrodes to contain warm plasma for stabilizing open magnetic confinement systems, such as a toroidal quadrupole cusp.⁵⁶ The augmentation of toroidal magnetic confinement by strong electrostatic fields was studied by Daugherty *et al*⁵⁷ and by Stix.^{58,59,60} Jones^{61,62} suggested the use of electron or ion injection to create radial electrostatic potential variations, instead of using plugging electrodes.

2. Theory

2.1 Electrostatic Potential

Magnetic electrostatic plasma confinement, which may be accomplished with any magnetic cusp configuration, is illustrated in Figure 9 for the case of a toroidal quadrupole cusp. High-voltage electrode rings are placed in each of the cusp gaps, as shown. The anodes are biased positive, and the cathodes negative. Operation of the confinement system depends mainly upon the voltage Φ_A applied between the cathode and anode, and little upon the relative location of the 'ground' potential. From Figure 9 it is evident that

$$\phi_A = \phi_e + \phi_i + \Delta_\phi \quad (7)$$

This potential shape is the same as that of a simple tandem mirror.

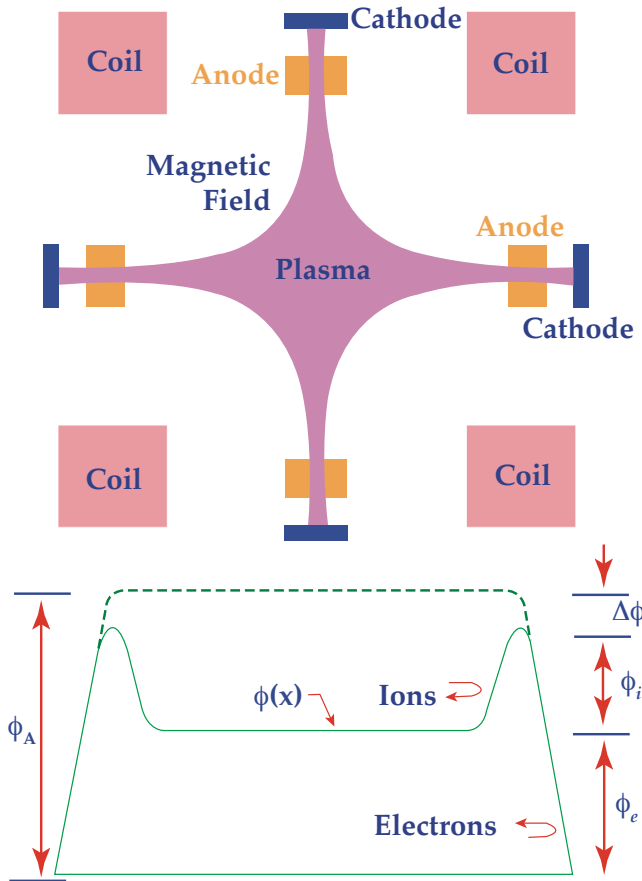


Figure 9 — An electrostatically plugged toroidal quadrupole magnetic cusp and the resultant distribution of electrostatic potential Φ . The broken line represents the potential with no plasma present.

In a vacuum, the interior of the device will be near the anode potential (broken curve of Figure 9). Plasma may be produced by electron beam injection into low-pressure gas, by rf (radio-frequency) heating, by plasma

gun injection, by laser-pellet heating, by neutral beam injection or by other means. Electrons exiting the cusps are reflected by the negative voltage of the cathode, but the exiting ions are not initially confined. Since electrons are lost less rapidly than ions, the plasma develops a slight negative charge, and the plasma potential becomes negative relative to the anodes (the full curve of Figure 9). If the anode gaps are narrow enough that their potential is not entirely shielded out by the plasma in the anode regions, then the potential there will be near the anode potential and higher than the plasma potential, forming a potential hill Φ_i for the remaining ions. Only a slight fractional charge imbalance is required to set up a potential hill many kV high. Then only ions with kinetic energies greater than $e\Phi_i$ can escape along the magnetic field lines out of the cusps. The two-dimensional potential distribution (Figure 10) is saddle-shaped in the anode regions, with the saddle point lying an amount $\Delta\Phi$ below the anode potential.

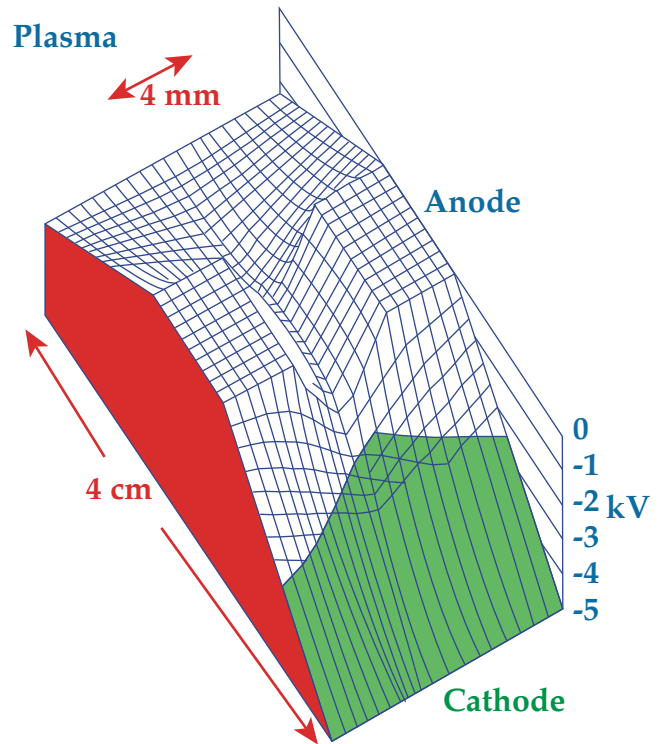


Figure 10 — Hypothetical equipotential surfaces in the anode region, showing saddle-shaped electrostatic potential distribution.

The potential hill for ions approaching the walls (at anode potential) is even higher, so most ions will go out through the cusp gaps as soon as they acquire enough energy to overcome the barrier Φ_i ; no ions acquire enough energy collisionally to surmount the barrier ($\Phi_i + \Delta\Phi$) and reach the walls. The ions are electrostatically confined in a negative electrostatic potential well produced by a slight charge imbalance. The ion Larmor radius is less significant than usual, because the ions are electrostatically reflected in the boundary layer. The maintenance of a potential difference along the mag-

netic field lines is facilitated by the boundary condition that the walls are very close to the plasma only in the anode gaps. Some energetic ions are replaced by cold ions as a result of charge exchange with neutral gas.

The central plasma region is uniform in density and temperature, free of electric and magnetic fields, and surrounded by a thin edge layer. The outside boundary of the edge layer is the magnetic surface along which electron orbits graze the anodes, and the inside boundary is the uniform central plasma region. The boundary layer thickness at any location with magnetic induction B is found by magnetic flux conservation to be

$$\Delta r \approx a \left(\frac{RB_a}{rB} \right) \quad (8)$$

where a is the anode gap half-width, R is the ring cusp anode radius and r the radius of the boundary layer. If $B_a = 5\text{ T}$, $B = 1\text{ T}$, $R = 4\text{ m}$, $r = 3\text{ m}$ and $a = 1.5\text{ mm}$ then $\Delta r = 10\text{ mm}$. This thickness is much less than the plasma size, so the plasma has a 'sharp boundary.'

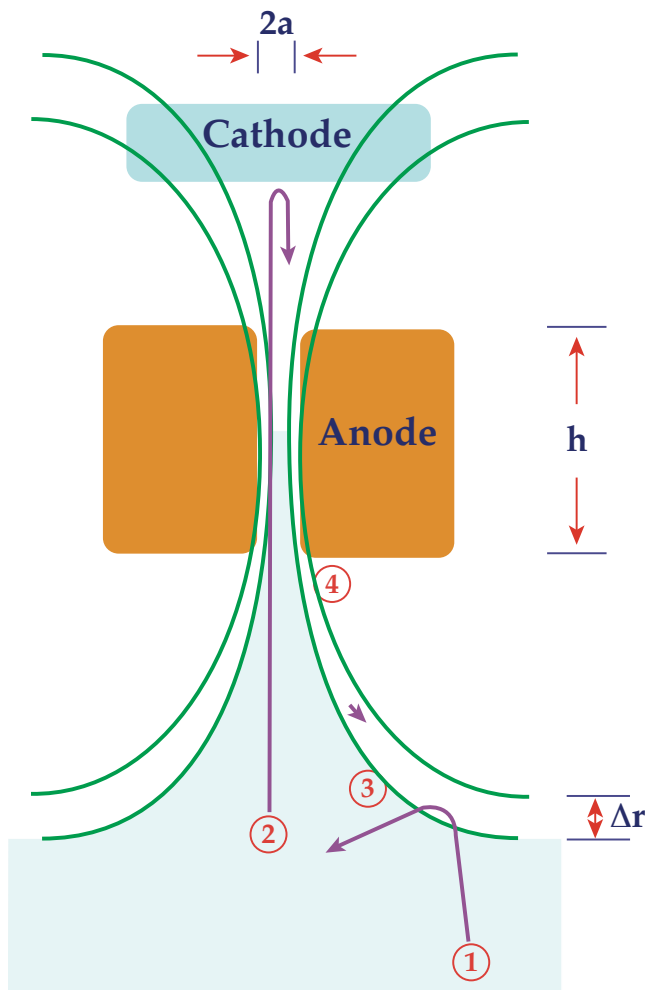


Figure 11 — Electron orbits near a magnetic cusp. Smooth arcs represent magnetic field lines. Dots represent ions. Electron trajectories are as follows: 1 = reflected off plasma

boundary, 2 = passing through anodes and reflected by cathode, 3 = magnetically trapped in boundary layer, 4 = electrostatically trapped by anode potential well.

2.2 Electron Orbits

There are several types of electron orbits, illustrated in Figure 11:

- (1) Electrons that stay in the central plasma and are reflected geometrically from the convex edge layer.
- (2) Electrons from the central plasma that can pass through the anode gap regions and be reflected by the cathodes.
- (3) Electrons that are magnetically trapped in the edge layer. (Many of these are mirror-reflected away from the cusp gaps.)
- (4) Cooler electrons that are electrostatically trapped by the anode potential. Most of these electrons are produced by ionization of incident neutral gas atoms along the slope of the potential well. These trapped electrons are deleterious, because they increase the self-shielding voltage drop $\Delta\Phi$.

Electrons may be produced by thermionic emission from an electron gun, by secondary emission from the plugging cathodes and by ionization of neutral gas. Much of the injected electron beam is reflected by the plasma and lost to the cathodes. This portion of the injected beam does not contribute to plasma density build-up. Yushmanov⁶³ found that only a small fraction of the injected beam current is effectively trapped. The time required for plasma density build-up by electron beam injection (many particle confinement times) exceeds the duration of the flat-top magnetic field in some pulsed experiments.

Many of the electrons produced by ionization will be magnetically trapped in the edge region. The untrapped electrons will circulate back and forth through the plasma, occasionally passing out through the anodes and being reflected by the potential barrier Φ_e . Coulomb collisions and electric field fluctuations cause diffusion in velocity space. Trapped electrons can become heated and detrapped, and free electrons can be deflected and trapped either magnetically or electrostatically.⁶⁴

There are two main electron loss processes: trapping by the magnetic field with subsequent diffusion to the anodes, and collisional diffusion in velocity space over the potential barrier Φ_e with loss to the cathodes. (Loss to the cathodes converts electron kinetic energy into electricity, returning energy to the power supply.) Recombination with ions is negligible.

2.3 Loss Rates over Potential Barriers

The loss rates along the magnetic field by velocity-space diffusion over the potential barriers have been calculated by Cohen *et al.*⁶⁵ based on the method of Pastukhov⁶⁶ For a plasma with singly charged ions, the resulting *particle* loss rates along the magnetic field are

$$\left(\frac{dn_k}{dt}\right) = \frac{-4n_k Z_k \exp(-y_k) I(1/y_k)}{\pi^{1/2} y_k \tau_k G(RZ_k)} \quad (9)$$

$$G(RZ_k) = \sqrt{1 + \frac{1}{RZ_k}} \ln \left\{ \frac{\sqrt{1 + \frac{1}{RZ_k}} + 1}{\sqrt{1 + \frac{1}{RZ_k}} - 1} \right\} \quad (10)$$

$$I(1/y_k) = 1 + 0.5 \sqrt{\frac{\pi}{y_k}} \exp(y_k) [1 - \operatorname{erf} \sqrt{y_k}] \quad (11)$$

$$= 1 + \frac{1}{2y_k} - \frac{1}{4y_k^2} + \frac{3}{8y_k^3} + \dots$$

where the subscript k denotes either electrons or ions, n_k is the particle density, $Z_k = 1$ for the electrons and $1/2$ for ions, R is the magnetic mirror ratio, τ_k is the characteristic collision time for electrons or ions, and $y_k = z_k e \Phi_k / T_k$ where z_k is the charge number ($= 1$ for singly charged ions, $= -1$ for electrons), e is the electronic charge and Φ_k is the potential barrier for electrons or ions (here z_e and Φ_e are, taken to be positive quantities).

The *energy* loss rates along the field are given by

$$1.5 \left(\frac{d(n_k T_k)}{dt} \right) = z_k e \phi_k \left[\frac{1}{I(1/y_k)} + \frac{1.5}{y_k} \right] \left(\frac{dn_k}{dt} \right) \quad (12)$$

A similar estimate of loss rates was made by Sizonenko and Stepanov⁶⁷ These equations give the rate at which particles or energy are lost by electron or ion diffusion in velocity space over their potential barriers Φ_e and Φ_i . In view of the $\exp(-y_k)$ factor in the particle loss equation, the confinement time should increase roughly exponentially with y_k . Computer simulations by McHarg and Oakes^{68,69} show such an exponential increase of parallel confinement time with Φ_k / T_k . In the limit of high plasma density or low temperature, collisions may be so frequent that these 'Pastukhov' equations lose validity, and the equations of Rognlien and Cutter⁷⁰ should be used. In MEPC devices the dominant electron losses are by diffusion across the magnetic field, but ion confinement is almost completely electrostatic.

Parks and Sleeper⁷¹ derived an equation predicting ion end loss rates in the transition region between the non-adiabatic region (central plasma) and the adiabatic region (boundary layer). In the non-adiabatic limit, their equation agrees with the result of Yushmanov⁷² and in the adiabatic limit, their equation is similar to the results of Chernin and Rosenbluth,⁷³ but with loss rates a factor of 3-4 higher, due to effects of magnetic field curvature.

2.4 Self-Shielding

The uncompensated electronic space charge tends to shield out the anode potential by an amount $\Delta\Phi$. Assuming azimuthal symmetry, the electrostatic potential distribution can be calculated from a two-dimensional Poisson equation in the anode gap

$$\frac{1}{r} \left(\frac{\partial}{\partial r} \right) \left(r \frac{\partial \phi}{\partial r} \right) + \frac{\partial^2 \phi}{\partial z^2} = \frac{(n - n_i) e}{\epsilon_0} \quad (13)$$

Due to the potential hill Φ_i , only a few ions are passing through the anode gaps, so $n_{-1a} \ll n_{-}$, as will be discussed later. With comb probe measurements in some experiments it was found that the distribution of electrons in the anode regions had bell-shaped distributions across the magnetic field. In order to model a variety of conditions, a Lorentzian-shaped density profile

$$n = \frac{n_a}{(1 + z^2 / w^2)} \quad (14)$$

is assumed, where n_a is the electron density at centre of the gap and the parameter w characterizes the half-width of the distribution. Assuming this electron density distribution in the anode region, with $n_{-a} = 1.5 \times 10^{17} \text{ m}^{-3}$, $a = 2 \text{ mm}$ and $w = 0.2 \text{ mm}$, results in the electrostatic potential distribution of Figure 10. The depth of the saddle point relative to the anodes is called $\Delta\Phi$. If the anode length along the magnetic field $b \gg a$, then a one-dimensional equation

$$\frac{d^2 \phi}{dz^2} = \frac{(n - n_i) e}{\epsilon_0} \quad (15)$$

can provide an accurate calculation of the potential distribution $\phi(z)$ across the magnetic field. Assuming $\phi(-a) = \phi(a) = 0$, solution of this equation yields

$$\Delta\phi = \left(\frac{\pi n_a e w a}{2 \epsilon_0} \right) \left[\left(\frac{2}{\pi} \right) \tan^{-1} \left(\frac{a}{w} \right) - \left(\frac{w}{\pi a} \right) \ln \left(1 + \frac{a^2}{w^2} \right) \right] \quad (16)$$

Since high-energy electrons flying through the anode gap have trajectories extending one or two Larmor radii

on each side of the center, it is assumed that $w \approx 2p_e$. The resulting values of $\Delta\phi$ are shown in Figure 12 as a function of n_a and B , assuming $T_e = 20$ keV and $a = 2$ mm. If $n_a = 10^{19} \text{ m}^{-3}$ and $B = 6$ T, then $\Delta\phi = 74$ kV.

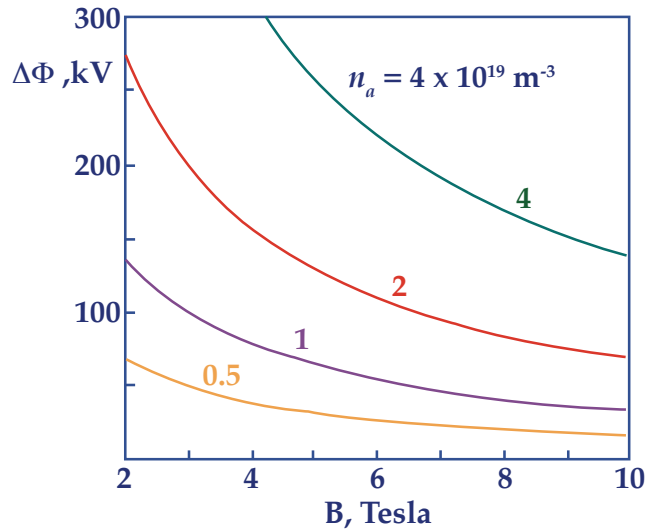


Figure 12 — Variation of self-shielding potential sag with magnetic induction, for various anode gap peak electron densities n_a , assuming $w = 2p_e$, $a = 2$ mm, $T = 20$ keV.

These could be typical parameters for a MEPC reactor. A comparable result was found by Ware and Faulkner,⁷⁴ assuming a triangular density distribution. The quantity in brackets varies from 0.96 at $\tau w/a = 0.01$ to 0.67 at $\tau w/a = 0.2$, so the approximation

$$\Delta\phi \approx \frac{\pi n_a e w a}{2\epsilon_0} \quad (17)$$

gives a slight overestimate of $\Delta\phi$. Expressing T_{ek} in keV and $\Delta\phi$ in kV, this becomes

$$\Delta\phi = 6 \times 10^{-15} \frac{\sqrt{T_{ek}} n_a a}{B} \quad (18)$$

which yields $\Delta\phi = 89$ kV (20% high) for the above example case. The maximum electric field occurs at the anode wall

$$\begin{aligned} E_{\max} &= -\left(\frac{d\phi}{dz}\right)_{z=a} \\ &= \left(\frac{n_a e w}{\epsilon_0}\right) \arctan\left(\frac{a}{w}\right) \approx \frac{\Delta\phi}{a} \end{aligned} \quad (19)$$

For typical values of MEPC experiments, the electric field energy density $(1/2)\epsilon_0 E_{\max}^2 \ll B^2/2\mu_0$.

2.5 Electron Density in Anode Gaps

Five phenomena affect the ratio n_a/n_e : ions in the gap, magnetic reflection, electrostatic acceleration, cold trapped electrons and diocotron oscillations.

2.5.1 Ions in the Gap

Assuming a quasi-cylindrical plasma with radius r_p and length L , the rate at which ions are lost is

$$\frac{\pi r_p^2 L n}{\tau_i} = N 2\pi R 2\delta n_{ia} u_{ia} \quad (20)$$

where n is the central plasma density, τ_i is the ion confinement time, N is the number of ring cusps, R is the ring cusp radius, δ is the effective half-width of cusp gaps for ions, n_{ia} is the density of ions flowing over the barrier and u_{ia} is the speed at which ions pass over the barrier. Ions just barely leaking over the potential barrier will have low velocities $u_{ia} \sim 3 \times 10^4 \text{ m s}^{-1}$, and they will be restricted to a narrow corridor of half-width $\delta \sim \tau w$. At equilibrium the ion particle confinement time will equal the electron confinement time, which is roughly equal to the diffusion time τ_{diff} across the magnetic field. Thus, the ion density in the anode gaps is estimated to be

$$\frac{n_{ia}}{n} = \frac{r_p^2 L_1}{4 R w u_{ia} \tau_{diff}} \quad (21)$$

where L_1 = distance between ring cusps. For the example MEPC reactor parameters of table 1, assuming $L_1 = 1.5$ m, it is estimated that $n_{ia}/n \sim 0.02$.

2.5.2 Magnetic Reflection

Sidorkin and Lavrent'ev⁷⁵ studied electron reflection by multipole cusp gaps, as illustrated in Figure 13. They showed that electrons with a $\alpha > \alpha_{crit}$ are reflected by the cusp field, where

$$\sin(\alpha_{crit}) = \sqrt{\frac{(1+x_0^{2m})x_0^{m-1}}{(1+x_0^{2m})x_0^{m-1}}} \quad (22)$$

$$x_0 = \left[\frac{m-1}{m+1}\right]^{1/2m} \quad (23)$$

$x = r/R$, r is the initial electron radius, R is the cusp gap radius and m is the number of pairs of multipole conductors = $N/2$. The values of α_{crit} are plotted as functions

of initial radii in Figure 14, for various values of m . In multipoles with large i the electrons have smaller critical angles, so more of them are magnetically reflected.

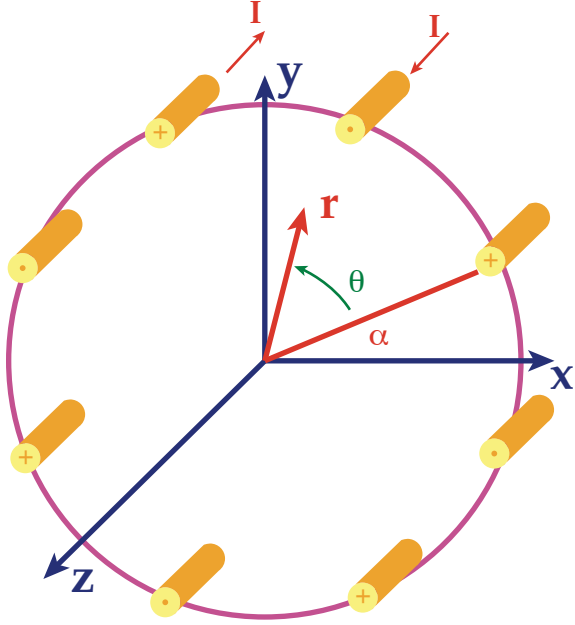


Figure 13a — Current carrying conductors of a multipole cusp. In this figure $N = 8$, $m = 4$.

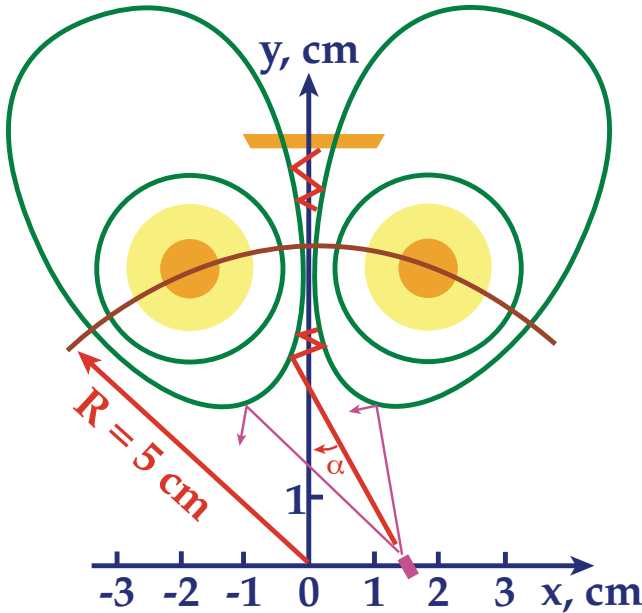


Figure 13b — Definition of the electron trajectory angle of incidence α relative to the mid-plane of the cusp gap. In this figure $N = 8$, $m = 4$.

Table 1 — MEPC Reactor Parameters Example

The plasma parameters were estimated using approximate scalings of attainable density, temperature, confinement time (section 3.7.1) and Q (section 4.1).

Ring cusp magnetic induction, $B_a = 6$ T

Applied voltage, $\phi_A = 400$ kV

Plasma radius, $r_p = 3$ m

Ring cusp anode radius, $R = 4$ m

Ring cusp anode gap half-width, $a = 2$ mm

Estimated Parameters	Equations
Central plasma density, $n_e \approx 10^{20} \text{ m}^{-3}$	(57) and Jupiter-2M
Electron and ion temperatures, T_e , $T_i \approx 20$ keV	(48), (49), (58)
Magnetic field at plasma boundary, $B_b \approx 1.3$ T	after (37)
Electron Larmor radius in anode gap, $\rho_a \approx 8 \times 10^{-5}$ m	after (37)
Electron Larmor radius at the plasma boundary, $\rho_b \approx 3.8 \times 10^{-4}$ m	after (37)
Self-shielding voltage drop, $\Delta\phi \approx 80$ kW	after (47)
Anode gap peak electron density, $n_{a-d} \approx 1.3 \times 10^{19} \text{ m}^{-3}$	after (16)
Energy confinement time, $\tau_{eL} \approx 6$ s	after (40)
Power gain ratio, $Q \approx 10$	after (60)

Electrons starting off at $r/R = 0.5$ near an octupole cusp ($m = 4$) have $x_0 = 0.938$ and $\alpha_{crit} = 29^\circ$. Experimentally measured electron beam transmission is consistent with such theoretical predictions. Assuming that the central plasma electrons have isotropic distributions, the total loss fraction through N cusps from a given location is approximately

$$\text{total loss fraction} \approx 0.5 \sum_{j=1}^N [1 - \cos(\alpha_{crit})_j] \quad (24)$$

If n_p = density of electrons that are able to penetrate into the magnetic cusps, the ratio n_p/n_e can be estimated from the volume-averaged value of this total loss fraction, but this calculation has not yet been performed.

2.5.3 Electrostatic Acceleration

Electrons that succeed in entering the cusp gaps are accelerated by the positive applied voltage there. Moir *et al.*⁷⁶ showed that the

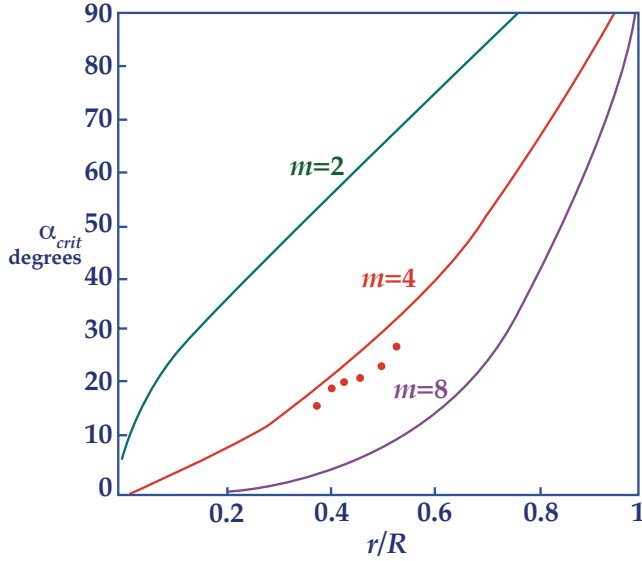


Figure 14 — Variation of critical reflection angle with radial position from which the electron trajectory starts, for various multipole orders. Smooth curves are theoretical, and full points are experimental data for $m = 4$.

electron density in the gaps is lower than the magnetically penetrating density n_p by a factor

$$\frac{n_a}{n_p} = \exp(y) \operatorname{erfc}(\sqrt{y}) = \frac{\left(1 - \frac{1}{2y} + \frac{3}{4y^2} - \frac{15}{8y^3} + \dots\right)}{\sqrt{\pi y}} \quad (25)$$

where $y = \phi_i/T_e$, and erfc is the complementary error function.⁷⁷ For values of $\phi_i/T_e = 3$ to 6, this ratio is $n_a/n_p = 0.29$ to 0.22.

2.5.4 Cold Trapped Electrons

Magnetic reflection and electrostatic acceleration tend to reduce n_a/n_p , but electrons produced by ionization of neutral gas tend to become electrostatically trapped in the anode region (orbit 4, Figure 11), increasing n_a/n_p . If classical cross-field diffusion were the only loss process, then the accumulation of trapped electrons could increase n_a and $\Delta\phi$ to unacceptably large values, but the diocotron instability may help remove cold trapped electrons without seriously impairing hot electron confinement.

2.5.5 Diocotron oscillations

The electric field due to electron space charge is zero at the middle of a ring cusp gap, increasing on each side. The resultant $E \times B$ drift velocity varies spatially, and the shear of this velocity gives rise to the diocotron (slipstream) instability.^{78,79} Computer simulations by Levy and Hockney⁸⁰ showed good agreement with theoretical instability growth rates. Pankrat'ev *et al.*⁸¹ found that the *long-wavelength* instability ($\lambda > 10\tau_w$, where τ_w is the electron stream half-width) occurs when the electron drift velocity is near the wave phase velocity, and it is suppressed by a nearby conducting wall. However, Gordienko *et al.*⁸² found that the presence of two groups of electrons (trapped and passing) in the anode gaps broadens the unstable range of wavelengths and makes diocotron oscillations unstable whenever there is a vacuum gap between the electron stream and the anode wall.

The *short-wavelength* instability ($\lambda < 0.2a$) occurs near the electron cyclotron frequency,

$$\frac{\gamma}{\omega_{ce}} \sim \left(\frac{q}{2}\right) \exp(-2/q) \quad (26)$$

and has a growth rate where $q = \tau_w \omega_{pe}^2 / \tau_w \omega_{ce}^2$. These diocotron oscillations play a beneficial role by removing cold trapped electrons from the anode region, where they would broaden the width τ_w of the electron density distribution and increase $\Delta\phi$. The instability growth rate is small if $q < 0.2$, which is equivalent to the condition that

$$n_a \leq (2 \times 10^{18} \text{ m}^{-3}) B_a^2 \quad (27)$$

where B_a is the magnetic induction in the gap (T). Thus, as n_a decreases well below this limiting value, the short-wavelength diocotron instability turns off. At $B_a = 5$ T, this limit is $n_a \leq 5 \times 10^{19} \text{ m}^{-3}$, which is less restrictive than the value of $n_a \leq 1.4 \times 10^{19} \text{ m}^{-3}$ required to keep $\Delta\phi < 100$ kV (Figure 12).

Yushmanov⁸³ studied the build-up and removal of trapped electrons in the anode regions, and determined the required anode dimensions. The width h of the anode (Figure 11) should be in the range

$$5a \leq h \leq h_{\max} \equiv 6.7 \left(\frac{\alpha\epsilon}{N}\right) \left(\frac{n_t}{n_a}\right) \left(\frac{\rho_a^2}{a^2}\right) \left(\frac{B_a}{B_b}\right) R \quad (28)$$

where $\alpha \approx 4.7$, ϵ = trapped electron pump-out rate/diffusion rate $\approx 1/3$, N is the number of cusp gaps and n_t/n_a is the trapped electron density/anode electron density $\approx 1/3$. Taking $N = 6$ in the example case of table 1, it is found that

$b_{max} \approx 4$ cm. Low-frequency oscillations can selectively pump out the trapped electrons without seriously increasing the loss rates of the free plasma electrons.

If the electrons in the central plasma have a quasi-Maxwellian distribution, the distribution will be up-shifted in energy by an amount $e\phi_i$ as the electrons enter the anode regions, as illustrated in Figure 15. Electrons produced by ionization in the plasma edge region will have a spread of energies. The diffusion rate is high for low-energy electrons, due to interaction with diocotron oscillations, and it may be nearly classical ($D \propto W_e^{-1/2}$) for high-energy electrons. The resulting electron energy distribution in the anode regions is expected to resemble the shifted Maxwellian distribution of Figure 15 (middle).

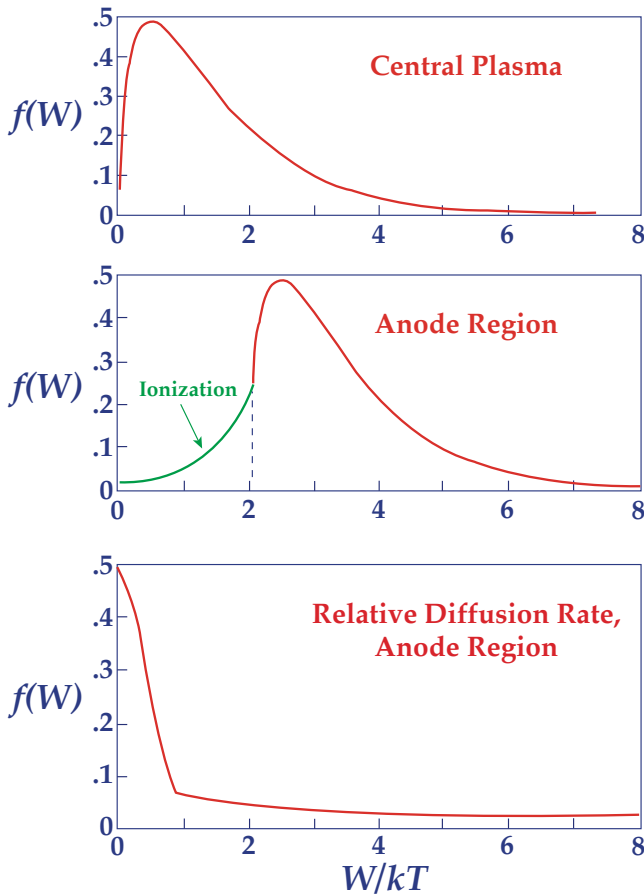


Figure 15 — Maxwellian distribution of central plasma electrons (top); shifted Maxwellian distribution in anode region, assuming $\phi_i = 2T_e$ (middle); relative diffusion rate in anode region, with effect of diocotron oscillations on cold electrons (bottom).

Some magnetically trapped electrons have low enough energies that they can immediately interact with diocotron oscillations; but most of them, having been accelerated by the anodes, must be decelerated by collisions before the diocotron oscillations interact strongly with them. For one example case⁸⁴ the trapped electron fraction was estimated to be $n_{tr}/n_{ad} \sim 0.24$. Considering ions, magnetic reflection, acceleration, cold trapped electrons

and diocotron oscillations, there will probably be about an order of magnitude density ratio between the anode region and the central plasma.

$$\frac{n_a}{n} \sim 0.1 \quad (29)$$

The ratio would probably be lowest for cases with a large volume of field-free plasma, narrow anode gaps and low neutral gas pressure; and it could be near unity for cases with spindle cusp magnetic field, wide anode gaps and high neutral gas pressure. Values inferred from data in a variety of experimental conditions range from 0.01 to 1.

2.6 Plasma Potential

At $T_e > 1$ keV and $n < 10^{20} \text{ m}^{-3}$ recombination is negligible. Ions are confined electrostatically with energy loss by charge exchange and by diffusion in velocity space over the potential barrier. The ion and electron particle conservation equations may be written:

$$\begin{aligned} \frac{dn_i}{dt} &= S_i - \left(\frac{dn_i}{dt} \right)_{(30)} \\ \frac{dn}{dt} &= S_i + \frac{I}{eV} - \left(\frac{dn}{dt} \right)_{\parallel} - \frac{n}{\tau_{\perp}} \quad (31) \end{aligned}$$

where S_i is the ionization source, I is the electron current from cathodes into the plasma and τ_{\perp} is the electron loss time by diffusion across the magnetic field. At equilibrium the plasma potential will adjust itself so that these electron and ion loss rates are equal⁸⁵

$$\frac{I}{eV} - \left(\frac{dn}{dt} \right)_{\parallel} - \frac{n}{\tau_{\perp}} + \left(\frac{dn_i}{dt} \right)_{\parallel} \sim 0 \quad (32)$$

Since

$$\phi_e = \phi_A - \phi_i - \Delta\phi \quad (33)$$

these two equations can be solved simultaneously⁸⁶ for the two unknowns ϕ_e and ϕ_i using equation (9) for the parallel loss rates. The plasma potential distribution has been computed self-consistently in some two-dimensional models.

2.7 Two-Dimensional Models

Brunel *et al*⁸⁷ solved a two-dimensional (r, z) Poisson equation, assuming nearly Maxwellian distribution functions dependent on the constants of motion. They calculated the distribution of potential and particle densities in an electrostatically plugged spindle cusp corresponding to the KEMP device. They found that the

electron and ion densities were both maximum on-axis. The electron density had a secondary peak in the ring cusp anode, and the ion density was very low in the anode regions. Matte and Lafrance⁸⁸ developed an improved numerical method for solution of the Poisson equation in MEPC devices.

Shoucri *et al*⁸⁹ simulated an MEPC plasma with about 5000 electrons and ions ($M/m_e = 16$, where M is the ion mass and m_e the electron mass) in a 128 x 50 cylindrical grid, using a capacitive matrix Poisson solver, with parameters similar to those of the KEMP II experiment. The simulation showed the maintenance of a two-dimensional electrostatic potential well, with saddle points in the anode gaps, as expected. Electrons were very well confined, but ion confinement was limited by plasma self-shielding in the point cusp gaps, especially during electron injection. The confinement time observed in the simulation was scaled up by the square root of the experiment/simulation density ratio to yield a predicted confinement time of 50-75 μ s for the KEMP II experiment, which was consistent with experimental measurements.

2.8 Energy Confinement Time

The non-radiative cross-field electron energy loss time may be written

$$\frac{1}{\tau_{E\perp}} = \frac{1}{\tau_{cond}} + \frac{1}{(\tau_{diff} + \tau_{trap})} \quad (34)$$

where τ_{cond} is the time for heat loss by conduction $\sim 1.51 \tau_{diff}$, τ_{diff} is the characteristic time for diffusion across the magnetic field and τ_{trap} is the time for free electrons in the central plasma to become trapped by the boundary magnetic field.

One estimate of the trapping time is⁹⁰

$$\tau_{trap} = 8\pi\epsilon_0 r_p \sqrt{\frac{2mvB_b}{ne^3 \ln \Lambda}} \quad (35)$$

where v is the electron velocity and $\ln \Lambda$ is the Coulomb logarithm. For reactor conditions $\tau_{trap} \ll \tau_{diff}$, and

$$\tau_{E\perp} \approx 0.6\tau_{diff} \quad (36)$$

Nearly classical transport has been observed in some MEPE experiments, while rapid anomalous transport has been seen in others.

2.8.1 Classical Transport

Pastukhov⁹¹ estimated the classical diffusion time to be:

$$\tau_{diff} = \frac{2\tau_{ei}aV}{S\alpha\rho_b\rho_a} \quad (37)$$

where τ_{ei} is the electron-ion momentum-transfer collision time, V is the plasma volume, S is the plasma surface area, $\rho_b = (2mkT_e)^{1/2}/eB_b$ is the electron Larmor radius at plasma boundary with $B_b = [2\mu_0nk(T_e + T_i)]^{1/2}$, $\rho_a = (2mkT_e)^{1/2}/eB_a$ is the electron Larmor radius in the anode gap and α is a parameter varying from 1.33 at $T_i/T_e = 0$ to 4.6 at $T_i/T_e = 1$. A similar estimate was derived by Dolan *et al*.⁹² Assuming $\ln \Lambda \approx 16$ in a hydrogenic plasma, the electron-ion momentum-transfer collision time^{44,93} may be reduced to the form:

$$\tau_{ei} = \frac{9.4 \times 10^{14} T_{ek}^{3/2}}{n} \quad (38)$$

where T_{ek} is in keV. For spindle cusps, $V/SR \approx 0.01-0.03$, depending upon dimensions, plasma heating and confinement effectiveness. (Low-pressure plasma have smaller volumes.) This low ratio plus diffusion enhancement by electron collisions with neutral gas give spindle cusps poor confinement times.

Assuming classical diffusion in a *spindle cusp* with radius R and length L , Lavrent'ev⁹⁴ derived analytical expressions for the electron density profile, the plasma volume, the average electron density and the electron confinement time. The electron energy loss rate is:

$$P_e = [\phi_i + \Delta\phi + 2T_e(\cosh(\rho) - 1)] \frac{\pi R^4 D_0 n_0 \rho}{r_a^2 L \sinh(\rho)} \quad (39)$$

where D_0 is the collisional (classical) diffusion coefficient, n_0 is the central plasma density, $\rho = (\tau_{\perp}/\tau_{\parallel})^{1/2}$, and r_a is the point cusp anode radius. This power loss is minimized when $\rho \approx 5$. Lavrent'ev found that the edge electric field can cause significant increases of electron transport rates in small devices with substantial neutral gas pressures. For the parameters of the Jupiter-1M device the electric field and electron mobility should result in about a 45% increase in the electron cross-field transport above the classical diffusion rate. In the case of a reactor with 'burn-out' of the neutral gas, however, the electron mobility would be small, and the electric field effect would be diminished.

Lavrent'ev⁹⁵ showed that angular momentum from $E \times B$ rotation produces an effective potential well Φ , that greatly inhibits axial ion losses, even if the point cusp electrostatic barrier $\Phi_i = 0$. A similar effect acts on electrons, but is m_e/M times weaker. Near the ring cusp the electric field effects dominate the ion motion. Dolgoplov *et al*⁹⁶ computed ion trajectories in an electrostatically plugged spindle cusp, and found that the magnetic field gradient force and the centrifugal force (re-

lated to the azimuthal $E \times B$ drift) tend to keep ions from escaping through the point cusps. This inhibition of point cusp ion losses makes plasma confinement effective in a linear set of ring cusps.

For a linear set of *ring cusps*, the volume-to-surface area ratio $V/SR \approx 0.1-0.3$ is an order of magnitude better than or spindle cusps. Assuming $V/SR = 0.02$ and $T_e = T_i$, equation (37) becomes

$$\tau_{diff} \approx 0.09 \frac{\tau_{ei} a R}{\rho_b \rho_a} \quad (40)$$

For the example MEPC reactor parameters case (table 1) it is found that $\tau_{ei} = 0.84$ ms, the diffusion time $\tau_{diff} \approx 20$ s and $\tau_{E\perp} \approx 12$ s. Since experiments have attained about half the classical value, a value of $\tau_{E\perp} \approx 6$ s is listed in table 1. This near-classical transport would make an attractive reactor, but anomalous transport could prevent a reactor from being successful.

2.8.1 Anomalous Transport

Pastukhov and Il'gisonis^{97,98} studied anomalous electron transport in the boundary layer of an MEPC plasma. When $T_i \ll T_e$, the ion acoustic instability is dominant, giving rise to rapid electron diffusion through the plasma edge layer. The long-wavelength ion-acoustic instability can occur at $k p_e \sim 1$ and $w \sim (\omega_{ce} \omega_{ci})^{0.5}$ when the electron density-gradient drift velocity $v_{\nabla n} > c_s$. The corresponding maximum diffusion coefficient $D_{max} \sim c p_e$, which has Bohm-like scaling. The resulting anomalous transport tends to broaden the electron density profile to a condition where $v_{\nabla n} \sim c_s$. The resulting theoretical electron density profile is given by:

$$n(r) = n_0 \exp(-e c_s A / c T_e) \quad (41)$$

where n_0 is the central plasma density and A is the magnitude of the magnetic vector potential. The waves are partially absorbed by the ions, and may heat them to the point where the instability turns off. When $T_i \sim T_e$, the ion acoustic instability becomes a Buneman instability, and the instability growth rate decreases by a factor of about $(m_e/M)^{1/2}$. Once electrons diffuse outside the bounding flux surface (the surface which just touches the anodes), they are magnetically mirror-confined (orbit 3 of Figure 11) until they scatter into the loss cone and travel along the magnetic field to the anodes. For a linear quadrupole with $a/p_e < 2(M/m_e)^{1/2}$, the anomalous electron confinement time is

$$\tau = \left\{ 0.4 + 0.3 \exp \left[2 \left(\frac{a}{\rho_e} \right) \sqrt{\frac{m}{M}} \right] \right\} \tau_0 \quad (42)$$

where τ_0 is the electron collision time. This case is similar to that of the ATOLL experiment, and the resulting confinement time is much shorter than with classical diffusion. Anomalous transport would spoil the energy balance in a reactor, resulting in a low fusion power density.

2.9 Energy Balance

As neutral atoms impinge on the plasma some are ionized in the boundary layer. The resultant ions are accelerated as they fall down the potential hill into the plasma region. However, Pastukhov⁹¹ found that this ion heating process is inefficient, and that ion heating by electrons is very slow. Ions are also heated by plasma waves. Ion energy is lost by charge exchange and by convection, as heated ions escape over the potential hill Φ_i . Since ions with energies $W_i > e\Phi_i$ are lost out the cusps, their distribution is truncated at higher energies, and the resulting fusion reaction rate is reduced.⁹⁹

Electron energy may be supplied by electron beam injection, neutral beam injection, wave heating and heating in the edge electric field. Electron energy is lost by electron flow over the potential barrier to the cathodes, by transfer to waves, by thermal conduction and convection across the magnetic field and by inelastic collisions with ions, atoms and molecules.

Approximate energy balance equations for the central plasma electrons and ions may be written

$$1.5d \frac{d(nT_e)}{dt} = \frac{I\phi_e}{eV} + P_E + 0.25n_i^2 \langle \sigma v \rangle W_{\alpha} f_{ae} - 1.5 \left[\frac{d(nT_e)}{dt} \right]_{\parallel} - 1.5 \frac{nT_e}{\tau_{E\perp}} - P_{rad} - 1.5n \frac{(T_e - T_i)}{\tau_{eq}} - S_m W_{loss} - P_w \quad (43)$$

$$1.5 \frac{d(nT_i)}{dt} = 1.5n \frac{(T_e - T_i)}{\tau_{eq}} + f_i S_m W_a + P_i + 0.25n_i^2 \langle \sigma v \rangle (f_{\alpha i} W_{\alpha} - 1.8e\phi_i) - 1.5T_i(1 - f_i)S_m + 1.5 \left(\frac{dn_i T_i}{dt} \right)_{\parallel} \quad (44)$$

where P_E is that portion of electron heating by the edge electric field which affects the central plasma, τ_{eq} is the electron-ion equipartition time, P_{rad} is the radiative power loss, W_{loss} is the average electron energy loss per incident neutral atom due to ionization, P_w is the electron power loss to plasma waves, f_i is the fraction of incident neutrals which are ionized (instead of causing charge exchange), f_{ae} and f_{ai} are the fractions of fusion product alpha energy W_{α} which are transferred to electrons and ions, S_m is the volume-averaged neutral input

rate, W_a is the average energy acquired along the slope of the potential well by ions, $\langle\sigma v\rangle$ is the DT fusion reaction rate parameter and P_i is the ion heating by plasma waves (such as ion acoustic). It is assumed that the average energy of each fuel ion undergoing a fusion reaction is about $0.9e\Phi_i$. Since the alpha particles are poorly confined, $f_{ae} \ll 1$ and $f_{ai} \ll 1$. Additional terms would be needed for neutral beam injection, microwave heating, etc. These equations are nonlinear, because several parameters depend on the density and temperatures. Similar equations have been solved numerically for several cases.⁸⁴ Typical conditions satisfying the plasma potential and energy balance equations were found to be

$$\frac{\phi_e}{\phi_A} \approx 0.5 \quad (45)$$

$$\frac{\phi_i}{\phi_A} \approx 0.3 \quad (46)$$

$$\frac{\Delta\phi}{\phi_A} \approx 0.2 \quad (47)$$

$$T_i \approx 0.05\phi_A \quad (48)$$

$$T_e \approx 0.05\phi_A \quad (49)$$


In order to confine plasmas with fusion reactor parameters, applied voltages $\Phi_A \geq 300$ kV are desirable.¹⁰⁰

Karpukhin *et al*¹⁰¹ studied particle and energy balance in an electromagnetic trap with $r_p \sim 0.3$ m, $B_a = 1.3$ T, $\Phi_A = 25$ – 50 kV, $V \sim 0.5$ m³, $a = 1.5$ mm and an electron injection power of 500 kW. They predicted values of $n \sim 3 \times 10^{19}$ m⁻³, $\tau_E \sim 0.1$ – 0.2 s and $T_i \sim 0.5$ – 1 keV. For an octupole electromagnetic trap they found the optimum electrode gap spacing $a = 0.5$ – 1 mm, which maximizes the injection efficiency, plasma density and confinement time.¹⁰² Energy balance calculations will be discussed further in section 4.1. In addition to spindle cusps, multipoles and ring cusps, two additional MEPC configurations have been studied recently: the Polywell concept and the modified Penning trap.

2.10 The Polywell Concept

Bussard¹⁰³ proposed electrostatic confinement inside a polyhedral array of magnetic point cusps (Figure 16), called a Polywell, with electron injection at 10 – 100 kV along point cusp axes to provide a quasi-spherical negative potential well capable of trapping and confining ions. The ions are to be injected at very low energies (< 100 eV) from the system boundary ($r = R$), along cusp axes or the axes of the polyhedron vertices. The electron distribution in the ‘mantle’ region ($r > r_c$) outside the

core is essentially spatially isotropic, but the electrons do not have a Maxwellian velocity distribution. The ion flow is expected to remain spatially anisotropic in the mantle region and to retain its non-equilibrium (nearly mono-energetic) nature over typical ion lifetimes.

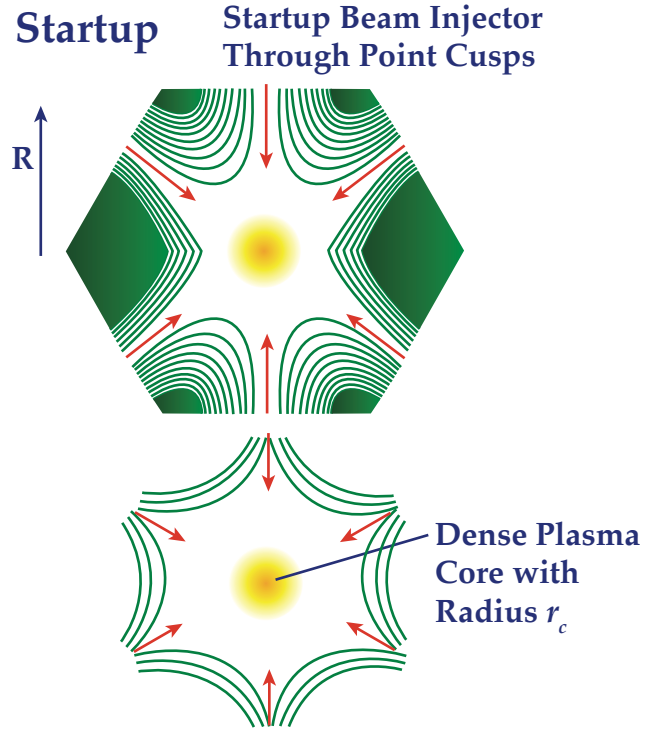

High-Beta Plasma Operation

Figure 16 — Electron injection through multiple point cusps in a Polywell device. The full curves represent magnetic field lines, which are pushed outward by electron diamagnetism during high-beta operation.¹⁰⁹

The degree of convergence of ions flowing radially to the central core is determined by angular momentum conservation to be

$$\frac{r_c}{R} = \sqrt{\frac{W_{\perp}}{e\phi_i}} \quad (50)$$

where W_{\perp} is the ion energy perpendicular to the radial direction and ϕ_i is the accelerating potential.¹⁰⁴ The Polywell concept is based on high-beta electron confinement by the magnetic field. Watrous *et al*¹⁰⁵ showed that the required diamagnetic currents could be achieved with reasonable electron injection conditions, yielding a relatively field-free internal region that enhances electron confinement. Krall *et al*¹⁰⁶ also studied the density and pressure anisotropy profiles resulting from various ion sources, and assessed processes which may degrade ion focusing, such as angular deflection and energy upscattering. They concluded that isotropy of the plasma core inhibits the Weibel instability.

Solving the Poisson equation for spherically convergent charged particle flows, King and Bussard¹⁰⁷ found that, with a high degree of electron recirculation within the system (with long electron lifetimes), central plasma densities of about 10^{25} m^{-3} could be attained at high electron gun currents. Bussard and King¹⁰⁸ distinguished two bounding operating regimes: a low-electron-beta mirror regime, where magnetic trapping and reflection are dominant, and a 'whiffle-ball (WB) regime', where a high-electron-beta plasma pushes the magnetic field outwards, so that the plasma is situated inside a quasi-spherical magnetic surface with small holes corresponding to the point cusps. In the WB regime they find that the electron recirculation factor G_{jo} (representative of the central plasma electron lifetime) increases almost linearly with $n_c r_c^2$, where n_c is the central electron and ion density within the core radius r_c . They advocated plasma start-up at low magnetic field, in order to avoid the mirror regime, which requires higher electron beam currents.

Three issues arise with the Polywell concept:

- (1) It may be difficult to achieve a high degree of ion focusing (small W_\perp), due to ion reflection by the scalloped electrostatic potential well boundary¹⁰⁹ and ion deflection by wave-particle interactions. Larger W_\perp would result in a larger core radius r_c and reduced central plasma density n_c . Further research is needed to clarify the attainable degree of focusing. Even if great focusing were not achieved, the Polywell might still function as a fusion reactor by using a larger radius R .
- (2) Initially mono-energetic electron or ion distributions may be driven toward thermodynamic equilibrium (approaching Maxwellian distributions) by enhanced collisional mechanisms, such as the beam-plasma and two-stream instabilities.¹¹⁰ It would be desirable to prevent the accumulation of cold electrons, in order to avoid the beam-plasma instability.
- (3) The polyhedral set of point cusps has magnetic field nulls on its surface, which might not confine high-pressure plasma well. However, no significant particle losses were associated with the null points in the early operation of the spherically convergent ion focus (SCIF) experiment.¹¹¹

2.11 Modified Penning Trap

Barnes and Turner¹¹² found that a time-varying external electrostatic quadrupole field in a uniform static magnetic field could induce large-amplitude, nonlinear oscillations of a non-neutral plasma with very high plasma

densities at the centre in one-, two- and three-dimensional cases. These oscillations are predicted to be stable at large amplitude.

By definition, the Brillouin ratio is the ratio of relativistic electron energy density to magnetic field energy density:

$$\text{Brillouin ratio} \equiv \frac{2\mu_0 n m c^2}{B^2} \equiv \frac{n}{n_B} \quad (51)$$

where n_B is the Brillouin density. In an ordinary equilibrium case $n/n_B \leq 1$, the 'Brillouin limit'. Turner and Barnes¹¹³ found that a class of flows with deviatoric strain can support charged particle densities with Brillouin ratios locally exceeding unity. This configuration does not require large-amplitude plasma oscillations. They showed that, in a toroidal geometry with a purely poloidal magnetic field, local values of the Brillouin ratio $n/n_B > 2$ could be sustained. The poloidal magnetic field could be produced by a toroidal quadrupolar current configuration outside the plasma, and a toroidal octupolar electric field applied outside the plasma could be used to sustain the required plasma configuration. With a $1/r$ term in the toroidal flow velocity, the Brillouin ratio at the x point (the center of the plasma) becomes infinite. In contrast to the usual Penning-trap-confined non-neutral plasmas, this configuration is not in thermodynamic equilibrium. Large values of the Brillouin ratio are feasible in a cold plasma when the electron velocity shear length $L_s \sim v/\omega_{pe}$.

Barnes *et al*¹¹⁴ studied non-neutral plasma confinement in a uniform magnetic field with an applied electrostatic quadrupole field (a Penning trap). They found a class of confinement that does not require a large velocity shear. The plasma reactivity is proportional to $\langle n^2 \rangle$, where $\langle \rangle$ denotes a space and time average. Since the Brillouin limit applies only in the volume-averaged sense, the reactivity can be enhanced by inducing large spatial variations of n over the plasma volume (such as ultrahigh n at the centre). Low-energy, low- P_θ (canonical angular momentum) charged particles (such as electrons or deuterons) could be injected into this spherical Penning trap. The effective parabolic spherical potential well of the applied electromagnetic field would accelerate the particles radially inwards to energies $\sim 100 \text{ keV}$. Convergence near the centre ($r = 0$) produces a dense, inertially confined, non-neutral plasma core. Strong focusing occurs only for a single charge-to-mass ratio q/m , so a pure deuterium plasma might be used. Miyamoto *et al*¹¹⁵ showed that, with a judicious choice of a rational integer determining the electric field shape, the DD fusion reaction products ^3H and ^3He could also be focused to pass through the central region, enhancing the fusion power density.

Another possibility is an initially pure electron plasma, with deuterium-tritium ions trapped in the virtual cathode. In the electron-plasma version low energy electrons would be introduced through one of the negative end-caps of the electrostatic quadrupole, as illustrated in Figure 17. In a reference frame rotating at angular frequency $\Omega = -eB/2m$, the Poisson equation becomes¹¹⁴

$$\nabla^2 \Phi = \left(\frac{e}{\epsilon_0} \right) (n_B - n) \quad (52)$$

The applied electric field is produced by electrodes with hyperbolic surfaces tangent to the spherical boundary of the potential well.

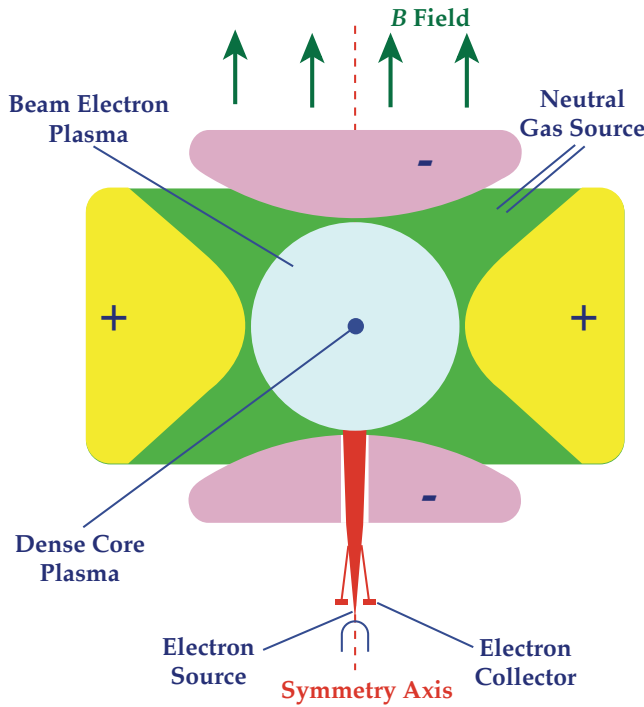


Figure 17 — Schematic diagram of the electrostatic quadrupole Penning Trap.¹¹⁴

Particles with energies $< 2V_0/3$ will be confined, where the applied voltage $V_0 = n_B e a^2 / 4\epsilon_0$.

The cold injected electron beam will be reflected near the centre of the spherical well ($r = 0$). If $P_0 = 0$, then the characteristic radius r_c of the dense central core could be comparable to a local Debye length. With finite perpendicular injection temperature T_\perp the angular momentum conservation equation yields

$$r_c \approx r_0 \sqrt{\frac{T_\perp}{W}} \quad (53)$$

where W is the electron injection energy and $r_0 \approx a/6$ is the radius of a virtual anode potential peak in the rotating reference frame. The electron beam velocity v varies slowly, except near the inner and outer turning points. From the steady-state continuity equation with $P_0 = 0$,

the density varies radially as $n(r) \approx n_c(a)r^2/r_c^2$, where a is the radius of spherical bounding surface, and the central core density $n_c \approx n_B a^2 / r_c^2$. Since n^2 decreases rapidly for $r > r_c$, the average of n^2 is estimated to be

$$\langle n^2 \rangle \approx \frac{n_c^2 r_c^3}{a^3} \approx \frac{16\epsilon_0^2 V_0^2}{e^2 a^3 r_c} \quad (54)$$

This proportionality to $V_0/a^3 r_c$ shows that the reactivity can be enhanced by high voltages and small radii.

The scaling was confirmed by numerically computing self-consistent Vlasov equilibria for an example case with $a = 3$ mm, $V_0 = 120$ kV, electron beam radial injection at $W = 50$ eV, $I = 0.125$ A, $T_\perp = 10^{-4}$ eV and $T_r = 5$ eV. The numerical result showed that a density $n_c \approx 4 \times 10^{25} \text{ m}^{-3}$ could be confined within $r_c \approx 0.4$ μm .¹¹⁴ For comparison, the above approximate equations yield $r_c \approx 0.71$ μm , $n_B \approx 3 \times 10^{18} \text{ m}^{-3}$, $n_c \approx n_B a^2 / r_c^2 \approx 5.3 \times 10^{25} \text{ m}^{-3}$ and $\langle n^2 \rangle \approx 3.7 \times 10^4 \text{ m}^{-3}$. Thus, for this example case the approximate scalings yield a core radius and density not far from the numerically computed values.

A second example case considered the effects of ions that partially neutralize the electron space charge. Assuming $n_i/n_e = 0.5$ for $r < 1$ μm , $n_i/n_e = (1-10^{-6})$ for $1 \mu\text{m} < r < r_0$, $n_i/n_e = 0$ for $r > r_0$ and $I = 0.425$ A, similar potential and density profiles were obtained, with $r_c \approx 0.3$ mm and $n_c \approx 4 \times 10^{25} \text{ m}^{-3}$. The neutral background penetrates most of the plasma, but within a small 'burn-out' radius high ion temperatures may be sustained. The central ion confinement time is about 0.25 ms, and a neutral gas pressure about 1-10 mPa would be appropriate. For this example case the predicted central ion temperature was 7.8 keV, and the DT fusion power would be about 50 mW, and the energy gain $Q = 10^3$. Calculations indicate that this configuration is stable against the two-stream instability, that Coulomb collisions do not significantly alter the electron beam velocity distribution, and that small angular momenta are attainable.¹¹⁴

Although such a Penning trap would not produce a large total power output, it could produce useful fusion reaction rates in a laboratory scale device. Higher-order multipole traps could generate higher power outputs.^{114,116}

Tiourine *et al*¹¹⁷ studied the use of higher-order multipole traps for non-neutral plasma confinement. The total electrostatic potential Φ is the sum of the externally applied potential Φ_{app} and the potential Φ_s generated by the plasma space charge. The plasma density, computed in terms of Φ using the Poisson equation, was assumed to be zero outside a closed boundary, and the plasma source potential Φ_s was computed assuming that it vanishes at large distances. Then the required value of applied potential $\Phi_{app} = \Phi - \Phi_s$. The magnetic field contours, plasma density contours and externally applied potential contours computed for the magnetic quadrupole ($l = 2$)

and magnetic hexapole ($l = 3$) cases in cylindrical geometry are shown in Figure 18.

$l = 2$ (magnetic quadrupole)

(a) isodensity

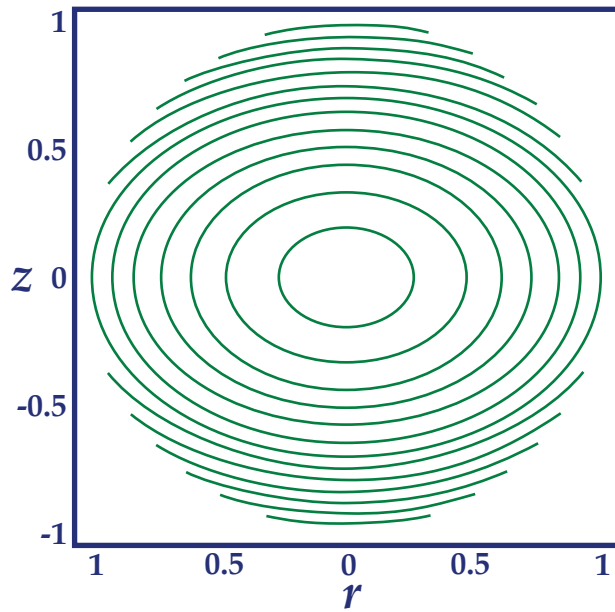


Figure 18a — Contours of plasma density for a magnetic quadrupole. 117

$l = 2$ (magnetic quadrupole)

(b) magnetic flux

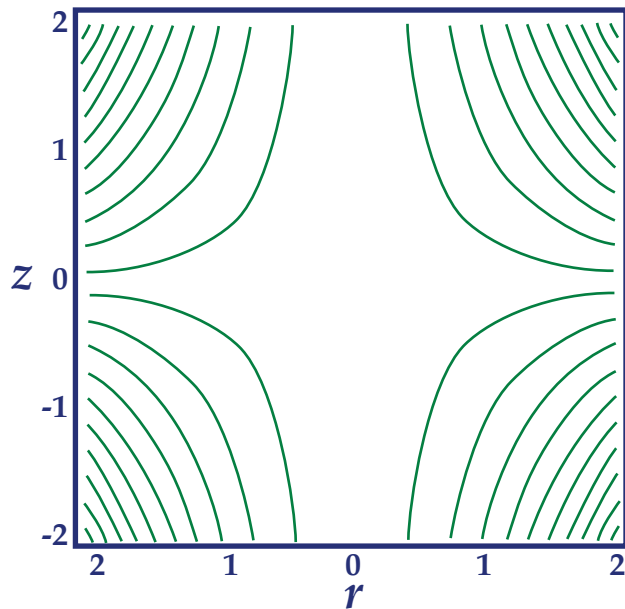


Figure 18b — Contours of magnetic flux for a magnetic quadrupole. 117

(c) externally applied
electrostatic potential

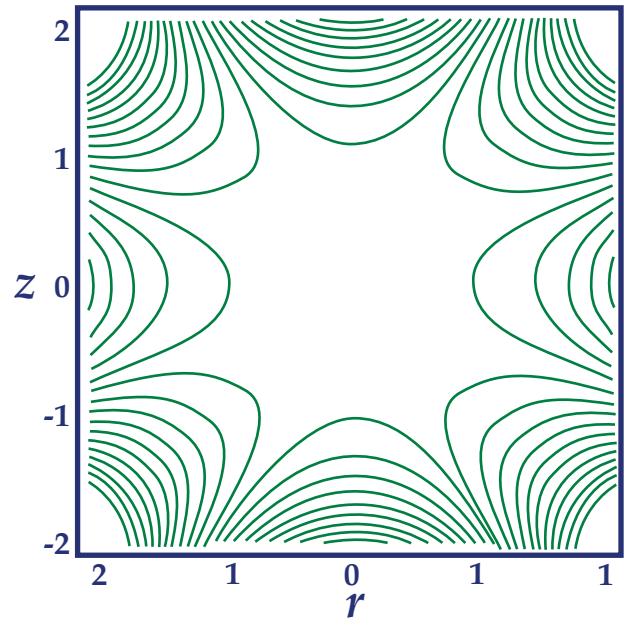


Figure 18c — Contours of externally applied electrostatic potential for a magnetic quadrupole. 117

$l = 3$ (magnetic hexapole)

(d) isodensity

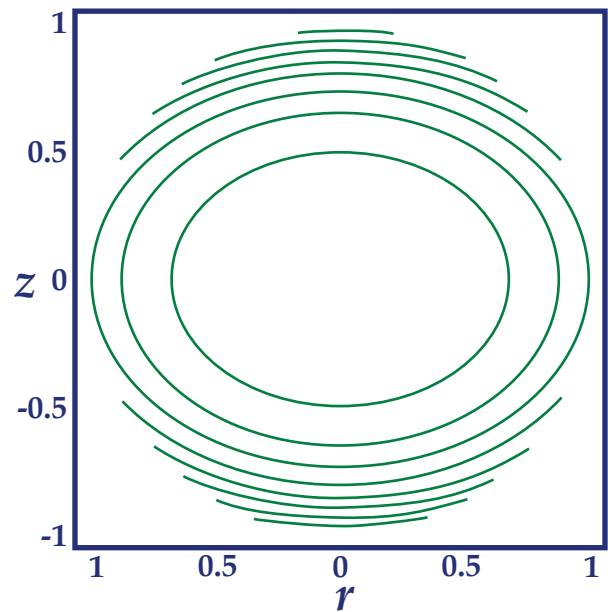


Figure 18d — Contours of plasma density for a magnetic hexapole. 117

$l = 3$ (magnetic hexapole)
(e) magnetic flux

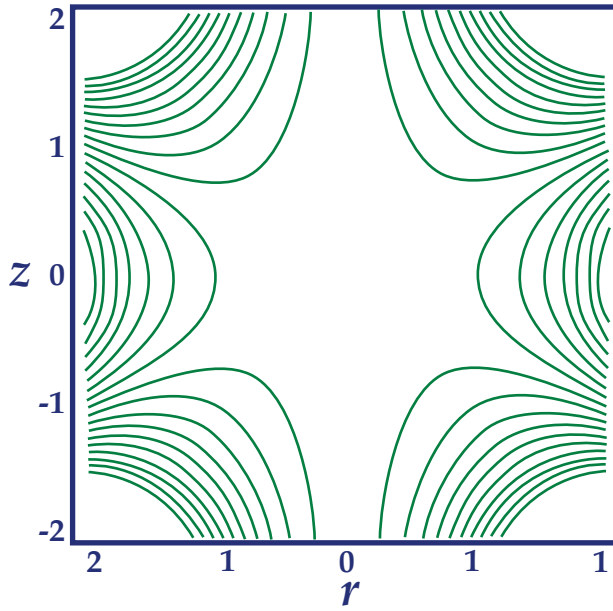


Figure 18e — Contours of magnetic flux for a magnetic hexapole. 117

(f) externally applied electrostatic potential

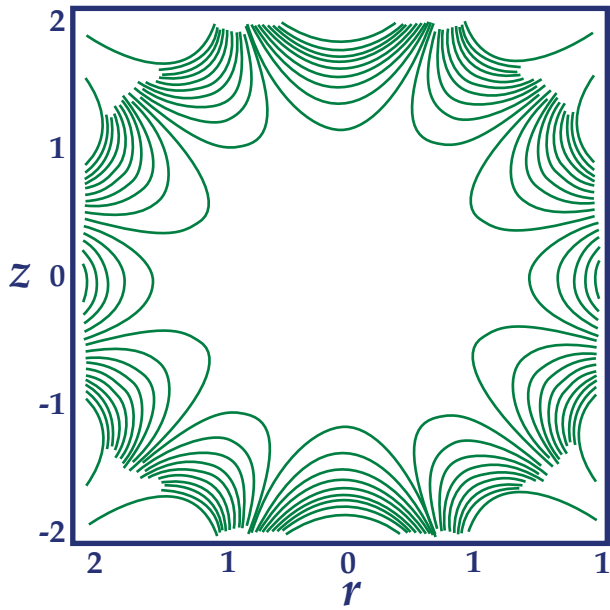


Figure 18f — Contours of externally applied electrostatic potential for a magnetic hexapole. 117

The global Brillouin ratio was found to be $\zeta = 2l/(l + 1)$, which approaches 2 for high-order multipoles.

Turner *et al*¹¹⁸ calculated the frequency of the non-neutral plasma anharmonic oscillations and found that ω/ω_c varies from $2^{-1/2}$ when $\delta = 0$ to $(2/3)^{1/2}$ when $\delta = 1$,

where $\delta \equiv (p_2 - p_1)/(p_2 + p_1)$, and p_1, p_2 are the turning points of the oscillations of the plasma boundary.

Although the studies of modified Penning traps are just beginning, they have shown several interesting features:

- (i) In a non-neutral plasma, densities exceeding the Brillouin limit can be confined by several means: in an oscillating plasma; in a flow with deviatoric strain (related to velocity shear) such as a toroidal magnetic quadrupole with applied electric field; in a homogeneous magnetic field with an applied electrostatic quadrupole and low-energy particle injection; in a higher-order magnetic multipole field with an applied electrostatic multipole.
- (ii) A large degree of focusing is possible, with resultant very high densities n_e inside the core radius r_e . This focusing can result in high values of reactivity, which is proportional to $\langle n^2 \rangle$.
- (iii) Higher-order magnetic multipoles can have global Brillouin ratios approaching 2.

While these results are not immediately conducive to an attractive fusion power reactor, further developments along these lines could result in newer configurations with more attractive properties. The evolution towards higher-order magnetic multipoles is similar to that of the electromagnetic trap experiments, which started with spindle cusps, then went to the toroidal quadrupole and higher-order multipoles, such as a linear set of ring cusps.

3. MEPC Experiments

3.1 Spindle Cusps and Mirrors

Early experimental studies of electrostatic plugging were conducted by Lavrent'ev^{5,36} and by Hilton *et al.*¹¹⁹ Due to financial limitations, most early experiments were pulsed spindle cusps, although spindle cusps are poor configurations for electrostatic plugging. Electrons were injected from electron guns in the point cusps, with plasma production by ionization of neutral gas. Pulsed magnetic fields have several disadvantages for MEPC experiments:

- (i) Eddy currents cause magnetic field errors;
- (ii) During magnetic field decay the plasma drift is outwards;
- (iii) Plasma density build-up and heating may take longer than the magnetic field lasts.¹²⁰

Experiments with spindle cusp electromagnetic traps like S-1, S-3M, S-4M, and Jupiter-1A showed that:

- (i) The electron confinement time increased by three orders of magnitude when the plugging voltage was applied.
- (ii) The electron confinement time was inversely proportional to the neutral gas pressure.¹²¹
- (iii) The rate of electron loss across the magnetic field was similar to that expected from classical diffusion due to collisions with ions and neutral atoms.
- (iv) The plasma density increased linearly with applied voltage, up to a stability limit.
- (v) The plasma density increased proportional to B^2 .^{122,123}
- (vi) The mean ion energy scaled linearly with applied voltage.¹²⁴
- (vii) The electron distribution function⁸¹ shown in Figure 19 is comparable to the theoretical curve of Figure 15.

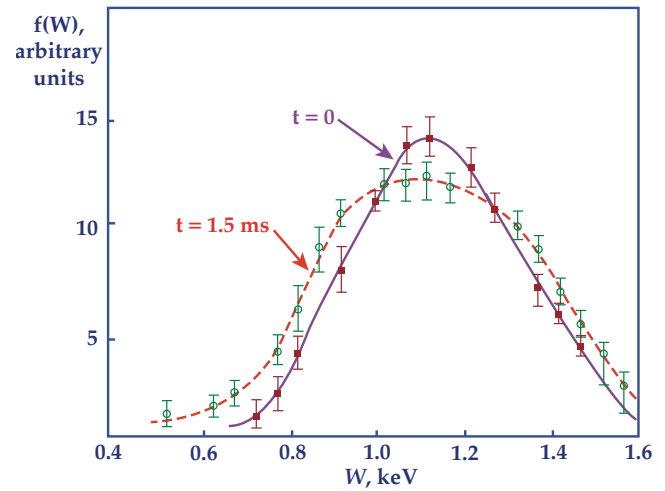


Figure 19 — Measured electron energy distribution in the anode region immediately after cut-off of electron beam injection, and 1.5 ms later.⁸¹

- (viii) A deep, negative potential well could be sustained for many ms, provided that the neutral gas pressure was low.
- (ix) Electron orbits and loss, angles agree with theoretically predicted values, provided that the starting point is within an adiabatic region.¹²⁵
- (x) Diocotron oscillations occurred, as predicted theoretically.

Experimental observations of diocotron oscillations in the ring cusp indicated the following:

- (1) The frequency of the oscillations was proportional to applied voltage and inversely proportional to magnetic field strength, as expected.
- (2) The growth rate of the instability was proportional to neutral gas pressure: and thus to the density of cold electrons produced by ionization.
- (3) By segmenting the ring cusp cathode, the relative ion currents as a function of azimuthal angle were measured. These measurements indicated that the long-wavelength instability had a mode number $m_z = 1$ or two wave periods around the circumference of the ring. Higher-mode numbers were apparently more stable.¹²⁶
- (4) The anode region electron density remained below the short-wavelength diocotron limit of equation (27).

Sugisaki¹²⁷ showed that the application of electrostatic fields to a magnetically confined plasma prolonged the plasma decay time. Strijland¹²⁸ studied particle orbits in an electrostatically plugged spindle cusp and the variation of confinement time with diaphragm diameter. With electrostatic plugging of a magnetic mirror,

Nishida *et al.*¹²⁹ observed a reduction of ion losses to 15% of the unplugged value, and ion heating by $E \times B$ rotation.

Vdovin and co-workers¹³⁰ studied electron loss processes from the S-4M electromagnetic trap. They derived an equation for equilibrium plasma density that varied with electron beam current, electron energy and neutral gas pressure in accord with experimental data. Plasma electron diffusion was dominated by scattering off gas molecules and molecular ions. They suggested that anomalous electron transport in the ring cusp region may be caused by a long-wavelength two-stream instability. The injected electrons had an anomalously fast loss rate in the S-4M electromagnetic trap, and neutral gas effects kept the plasma cold (a few eV temperature).

According to measurements by Komarov *et al.*¹³¹ with a two-wavelength microwave interferometer in the Jupiter-1A spindle cusp device, the central density was an order of magnitude higher than the average density. Zalesskii *et al.*¹³² found that the plasma accumulation rate with microwave heating was much faster than with electron beam injection, and about 50% of the microwave power was coupled to the plasma.

Stepanenko and Komarov¹³³ measured the Jupiter-1A electron and ion energy spectra during microwave heating with 10% power absorption, and determined the electron energy confinement time to be about 0.9 ms. The dominant ion energy loss mechanism was charge exchange.

Electron and ion energy spectra were measured with gridded electrostatic energy analyzers at the point cusps. The electron energy distribution is shown in Figure 19. The ion energy spectra were measured with a drift mass spectrometer combined with an electrostatic ion-energy analyzer. The distribution appeared to have two Maxwellian components. The higher-temperature component was believed to be caused by the initial formation of the potential well. The average energy of the ions increased linearly with applied voltage, $\langle W_i \rangle \sim 0.18 \Phi_A$.³⁶

Komarov and Stepanenko¹³⁴ measured the spatial variation of the total number of electrons N_e leaving the ring cusp gap, and found a narrow distribution with width $\delta \sim p_e$, as shown in Figure 20. At an electron energy of 0.55 keV, $p_e = 0.1$ mm. The distribution was narrower at high plasma densities, indicating that electron losses along the magnetic field became important relative to cross-field diffusion losses. The model profile with $\tau w = p_e$ is roughly consistent with the experimental data, but $\tau w = 2 p_e$ is used here in estimating future device parameters to avoid underestimating $\Delta \Phi$. Komarov and co-workers¹³⁵ also measured the distributions of electrons and ions in a point cusp gap, finding a narrow electron stream with radius < 1 mm.

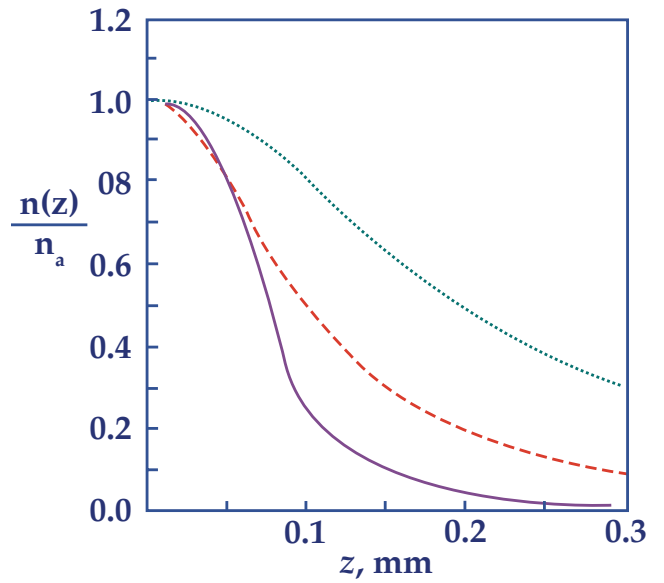


Figure 20 — Experimentally measured electron density distribution (full curve) in the ring cusp of the Jupiter 1A device at $\Phi_A = 6$ kV, $B = 0.82$ T, and model profiles $n/n_a = 1/[1 + (z/w)^2]$ with $w = p_e$ (broken curve) and $w = 2p_e$ (dotted curve).

In the KEMP-II spindle cusp experiment Stansfield and colleagues¹³⁶ measured $n \sim 4 \times 10^{17} \text{ m}^{-3}$, and electron energies ~ 1 keV. Ionization of gas prolonged the plasma density persistence after electron beam cut-off.

3.2 Jupiter-1M

The Jupiter-1M spindle cusp experiment at Kharkov¹³⁷ had pulsed magnetic point cusp fields ≤ 13 T (25 ms half-period), ring cusp fields ≤ 4 T, electron injection voltages ~ 4 kV, plugging voltages $\Phi_A \sim 6$ kV, electron beam injection current ≤ 2 mA, neutral gas pressure 0.1–1 mPa and plasma volume 30 cm³. It attained plasma densities up to 10^{18} m^{-3} , with temperatures ~ 100 eV and confinement times ~ 1 ms. The short duration of the pulsed magnetic fields did not allow enough time for build-up of higher plasma densities. The plasma losses from the point cusps were less than from the ring cusp.¹³⁸

Komarov and colleagues¹³⁹ used gridded analyzers to measure the energy distributions of electrons and ions emerging from the cusp gaps after removal of the plugging voltage. The mean ion energy observed under those conditions was about one-fifth of the plugging voltage. For a few microseconds after electrostatic plugging was removed, the remaining ions were accelerated to higher energies by the plasma potential.¹⁴⁰ The measured potential barrier in the ring cusp for ions $\Phi_i \sim 3T_i$ exceeded the calculated barrier $\sim 2T_i$. The barrier height in the point cusp was practically zero, but most of the ion losses occurred through the ring cusp. Point cusp ion losses were probably retarded by the centrifugal and magnetic field gradient forces.¹⁴¹

Azovskii and colleagues¹⁴² found that the inner bounding surface of the plasma in the Jupiter-1M experiment has a radius $r_0 = (2Rp_0)^{1/2}$ in the point cusp (where p_0 is the electron Larmor radius in the point cusp), as predicted from flux mapping to the ring cusp. The density of plasma flowing out of the point cusp was two orders of magnitude lower than the central plasma density, and $\Delta\Phi \approx 0.5$ kV was inferred from the shape of the ion energy distribution emerging from the point cusp.¹⁴³

Azovskii and co-workers¹⁴⁴ measured the plasma density in Jupiter-1M simultaneously by a microwave interferometer and by the integral of the ion loss current, and found that $n_e \approx 10^{18} \text{ m}^{-3}$. The lifetimes of electrons injected from the gun were much shorter than the lifetimes of plasma electrons produced by ionization. The confinement time of the bulk plasma was about a factor of five lower than classical, assuming that the electrons were produced by ionization. The injected fast electrons left quickly (~ 0.01 ms), perhaps due to a two-stream instability, and imparted only about 1-2% of their energy to the plasma. The electron current had 0.1-1 MHz modulations. Probe measurements showed that the electron density profile was not consistent with a theoretical profile based on classical transport.¹⁴⁵

Factors influencing the electron confinement times included the magnetic field geometry, impurities in the plasma, ionization of neutral gas and electron mobility in the electric field. The effect of the centrifugal force on radial electron transport would be less significant in large devices. Since the electron mobility is related to the neutral gas density, its contribution was significant in small devices, but would be reduced in high-temperature plasmas, where most of the neutral gas becomes ionized.¹⁴⁶

From ion energy distributions measured outside the point cusp and ring cusps of the Jupiter-1M device at $\Phi_A = 6$ kV, Azovskii and co-workers¹⁴⁷ deduced the amount of potential sagging in the anode gaps, and found $\Delta\Phi$ (ring cusp) = 0.4 kV, $\Delta\Phi$ (point cusp) = 0.6 kV. These values correspond to uncompensated anode electron densities $n_{a-} \sim 10^{17} \text{ m}^{-3}$, while the central electron density $n_e \sim 10^{18} \text{ m}^{-3}$. The electronic space charge in the anode gaps was partially compensated by ions flowing out the cusps. Although the ion potential barrier Φ_i was lower in the point cusp, the ion loss rate there was lower than in the ring cusp. From gridded analyzer data they found that the ion energy distribution was nearly Maxwellian with $T_i = 40$ -60 eV. T_i was slightly higher at the plasma edge, where the electric field was large.¹⁴⁸

Azovskii and colleagues¹⁴⁹ measured the electrostatic potential and electron temperature in Jupiter-1M. At the end of electron beam injection the potential sag in the point cusp cathode $\Delta\Phi \sim 1$ kV. The electron temperature

reached 25 eV, then dropped rapidly after electron beam injection cut-off. Using an 8 keV Ar⁺ probe beam, they measured the energy spectra of Ar²⁺ ions emerging from the ring cusp and deduced the time variation of the central plasma potential. When energetic electrons were injected into low-pressure hydrogen, the plasma potential ($\Phi_i + \Delta\Phi$) initially was very large. As ionization built up the plasma density, the plasma potential decreased to a plateau value on the order of 0.1 Φ_A . After the electron beam injection was turned off, the plasma density and potential decayed to zero in a few milliseconds.¹⁵⁰

3.3 Magnetic Multiples

Nakamura *et al.*¹⁵¹ observed enhancement of ion confinement in a multipole magnetic field by a negative electrostatic potential well produced by electron injection into the plasma. Hershkowitz *et al.*¹⁵² observed similar effects.

Lavrent'ev and colleagues^{153,154} studied the plasma produced by injection of 100 mA of 1 keV electrons into a pulsed multipole trap. They measured $n_e \approx 10^{17} \text{ m}^{-3}$, confinement time $\approx 50 \mu\text{s}$ and $T_i \approx 300$ eV. Using the attenuation of a calcium ion beam during a 30 μs period of electron injection, they observed, a rapid density build-up to $4 \times 10^{17} \text{ m}^{-3}$, followed by a decay after electron beam cut-off. With probe measurements they found a uniform central plasma density dropping off steeply in the boundary magnetic field layer.¹⁵⁵ Lavrent'ev *et al.*¹⁵⁶ found that the plasma lifetime in a multipole electromagnetic trap depended very strongly on the magnetic field in the gaps, decreasing from 1.3 ms to 0.1 ms as the field was reduced from 0.3 T to 0.15 T.

Moir *et al.*¹⁵⁷ proposed a toroidal quadrupole MEPC experiment using soft iron to enhance the magnetic field shape and to minimize the required coil currents.

Maffei *et al.*¹⁵⁸ constructed a spherically convergent ion focus (SCIF) device based on Bussard's Polywell concept (a polyhedral set of point cusps), with planned values of $B = 0.2$ T, $\Phi = 20$ kV, $I = 75$ A from three electron guns and plasma production by electron cyclotron heating.

3.4 ATOLL

The ATOLL toroidal quadrupole magnetic cusp device is shown in Figure 21. Typical parameter values are $B_d = 0.8$ T, $\Phi_A = 2$ kV, $p = 0.2$ -0.5 mPa hydrogen, impurity fraction = 1-2% (dominant mass = 28), $n_e \approx 3 \times 10^{17} \text{ m}^{-3}$, $T_e \approx 100$ eV and average ion energy ≈ 100 eV. Ioffe *et al.*¹⁵⁹ checked the alignment of the magnetic field with the anodes by observing the flow of electrons from an electron gun placed in the plasma region. The alignment accuracy was better than 0.2 mm. Diagnostics included an 8 mm microwave interferometer, currents drawn by

electrodes, a charged particle energy analyzer, Langmuir probes (including a tiny probe suspended by a 12 μm tungsten fiber), a charge exchange neutral atom energy analyzer, a pulsed vacuum gauge and a partial pressure analyzer.

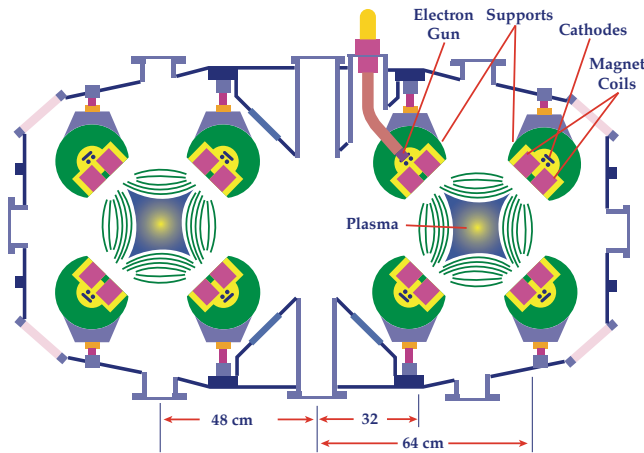


Figure 21 — The ATOLL toroidal quadrupole cusp device¹⁶⁰

In one mode of operation the plasma was sustained by electron injection from a gun plus secondary emission at the reflecting cathodes. This mode resembled a Penning discharge with the end walls outside the cusps.

In another mode of operation Ioffe and co-workers¹⁶⁰ minimized the plasma impurity content by careful wall preparation and by the use of very pure hydrogen. Ionization of neutral gas made up for particle losses, and the electrons were heated by the intense electric field in the boundary layer. At high magnetic fields and low pressure the discharge could become self-sustaining without electron injection or secondary emission from the cathodes. This regime had similar plasma parameters, but less noise, better ion confinement and higher T_e than the first regime. This 'emission-free' discharge was extinguished by adding 5% of an impurity, such as nitrogen. Impurities increased radiation losses and diffusion rates, and reduced the potential well depth.

The plasma potential increased linearly with magnetic field and had a nearly parabolic radial distribution. Ions produced by ionization at the edge were heated as they fell into the potential well, and the average ion energy increased with increasing magnetic field. From the plasma confinement time it was inferred that the potential barrier Φ_i impeding ion loss through the cusps was very small. Ioffe and colleagues¹⁶¹ found that the electrostatic potential in the cusp gaps was equal to the potential at the plasma centre, to within experimental accuracy (10%). The hypothesis of a narrow 'neutral corridor' through the cusps with no confining potential barrier ($\Phi_i = 0$) was also consistent with the measured variation of plasma potential with magnetic field.

The electron potential barrier $\Phi_e \sim 10 T_e$, so electron losses were predominantly by cross-field diffusion. From the ionization rate Ioffe and co-workers^{162,163} inferred a plasma confinement time of 0.18 ms. This was close to the theoretical confinement time, based on the ion acoustic instability, of 0.12 ms, and much shorter than the classical confinement time of 50–150 ms. Similarly, the measured electron density profile was close to that predicted above for the ion acoustic instability, with a gradient scale length on the order of the ion sound Larmor radius, and far from the profile based on classical diffusion. Pterskii and co-workers^{164,165} observed oscillations at 40–80 MHz propagating in the electron diamagnetic drift direction at about 10^5 m s^{-1} , which appeared to be consistent with ion acoustic instability theory. According to Lavrent'ev¹⁶⁶ the cross-field transport resulting from the observed profiles and oscillations in ATOLL should be inwards.

Later measurements revealed that three instabilities were occurring simultaneously in ATOLL diocotron oscillations in the cusp gaps, a long-wavelength ion acoustic instability in the plasma interior and a lower hybrid drift instability at the plasma edge.

Pterskii *et al*¹⁶⁷ observed diocotron oscillations in the cusp gaps at frequencies of 40–70 MHz, with wavelengths of 1–2 cm and peak amplitudes $\sim 100 \text{ V}$. The wave phase velocity was somewhat lower than the electron $E \times B$ drift velocity in the anode gaps, by a factor of 1.5–2; but this difference could be partly due to simplifying assumptions used in the analysis, such as the shapes of the electron density distribution and electric field distribution in the anode gaps. The theoretical maximum growth rate of the diocotron oscillations occurs at $\lambda \sim 16a$, which is within the range of wavelengths observed. The instability became stronger with increasing plasma potential and decreasing magnetic field, as expected for diocotron oscillations. In the central plasma the amplitude of the diocotron oscillations decayed with distance from the anode-gaps with a scale length of about 5 cm, as expected theoretically.

Pterskii and co-workers^{168,169} found that the lower hybrid drift instability is dominant in the boundary region where the density is low. The theoretical values of most unstable wavelength (1 cm), frequency (12 MHz) and phase velocity ($1.2 \times 10^5 \text{ m s}^{-1}$) are consistent with experimental data. This instability causes anomalous electron transport, flattening the electron density profile until the density gradient scale length ($n_L/\nabla n_e$) exceeds the local ion Larmor radius p_i . Thus, the confinement times in ATOLL were much shorter than classical confinement times, and the anomalous transport was well understood in terms of the lower hybrid drift and long-wavelength ion acoustic instabilities.

3.5 Jupiter-2M

The proposed Jupiter-2 experiment¹⁷⁰ was to be a linear set of ring cusps with $B_z = 5\text{ T}$ (point cusps), $\Phi_A = 25\text{ kV}$, $V = 0.5\text{ m}^3$, $n_e > 10^{19}\text{ m}^{-3}$, $T_i \sim 1\text{ keV}$ and $\tau_E \sim 100\text{ ms}$. Due to financial limitations, a one-third scale model of Jupiter 2, called Jupiter-2M¹⁷¹ has been built first (Figure 22), with a primary goal of studying electron transport.

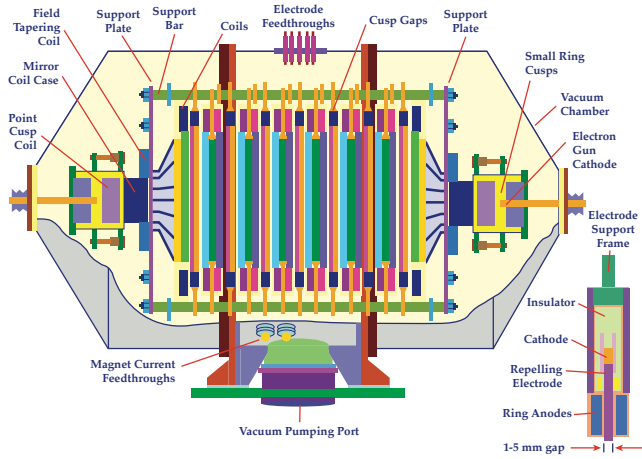


Figure 22 — The Jupiter-2M device (left) and electrode region detail (right).¹⁷¹

The Jupiter-2M device has seven ring cusps with $R = 0.215\text{ m}$ in the central region flanked by one small ring cusp and point cusp at each end. The axial length between the point cusps is 1.30 m . The coils are pulsed from a capacitor bank and reach peak fields in about 33 ms . The maximum attainable ring cusp and point cusp magnetic fields are about 1.94 and 3.88 T , respectively, but lower fields have been used in experiments. The shape of the vacuum magnetic field is illustrated in Figure 23.¹⁷¹

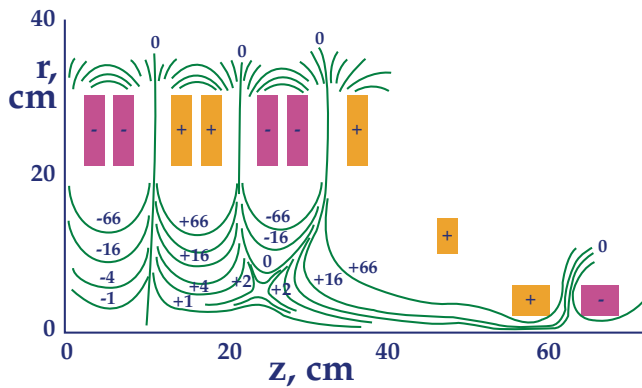


Figure 23 — Vacuum magnetic field lines in the Jupiter-2M device.¹⁷¹

The plugging electrode positions were adjusted by screws until comb probes at three azimuthal locations 120° apart showed no asymmetry of the electron loss currents emerging from the cusps. The total plasma volume is 501 , and the volume of the uniform central region is 161 .

The classical electron diffusional loss rate is^{172, 173}

$$I_{diff} = \left[D_a \left(1 + 0.5 \frac{\phi_p}{T_{e0}} \right) + D_{ei} \right] F n_0 R^2 \text{ electrons / s} \quad (55)$$

where D_a is the electron diffusion coefficient due to collisions with neutral atoms, $\phi_p = \Phi_i + \Delta\Phi$, D_{ei} is the electron diffusion coefficient due to collisions with ions, n_0 is the central electron density, T_{e0} is the central electron temperature, and F is the geometrical factor having dimensions of reciprocal length. The ϕ_p term represents electron mobility in the strong edge electric field. The electron confinement time is

$$\tau_{diff} = \frac{N_e}{I_{diff}} = 1.11 \frac{\pi R^3 n_0}{I_{diff}} \quad (56)$$

where N_e is the total number of electrons in the plasma. For the geometry of the Jupiter-2M experiment $F = 900/\text{cm}$.

Preliminary low-field operation at $B \sim 0.5\text{ T}$ (ring cusp) with a 1.3 kV , 0.12 A electron beam injection into $2 \times 10^{-6}\text{ torr (H}_2\text{)}$ produced a plasma with $n_e = 5 \times 10^{17}\text{ m}^{-3}$, $T_e = 13\text{ eV}$, $\tau_e > 2\text{ ms}$. With $\Phi_A \sim 2\text{ kV}$, the plasma potential was about -300 V relative to the grounded chamber walls. About 80% of the injected electron beam energy appeared in the plasma. Although the point cusp anode diameters were 25 mm , the ion loss through the point cusps was only 6% of the total ion loss rate.

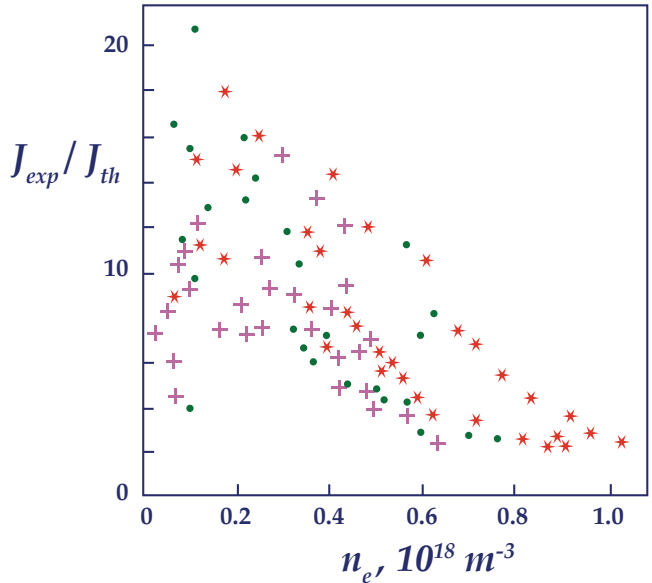


Figure 24 — Ratio of experimental to theoretical electron loss currents, as a function of plasma density. $B = 0.375\text{ T (+)}$, 0.5 T (★) , 0.625 T (●) ¹⁷⁴

High-frequency oscillations were not observed in Jupiter-2M. The large uniform central plasma may serve as a buffer to damp out surface oscillations. Vdovin *et al.*

al.¹⁷⁴ found that the ratio of experimental electron loss current to theoretical loss current decreases with increasing plasma density, as shown in Figure 24. At higher plasma densities, the experimental loss rate was about twice the classical value. The measured ion loss rate corresponds to an ion potential barrier $\Phi_i/T_i \sim 4$.

Auxiliary electrodes were used to suppress secondary electron emission from the plugging cathodes. Diaphragms limiting the plasma boundary in the point cusps and between the ring cusps served two functions:

- (i) to reduce particle flow onto the anodes, where gas emission stimulated by particle bombardment would tend to fill the gap with cold plasma.
- (ii) to study the influence of the diaphragm size on plasma transport.

Ring diaphragms with diameters of 21, 24 and 28 cm corresponded to ring cusp diffusion layer widths $a = 0.9, 1.6$ and 2.0 mm.

The theoretical electron density profile depends little on the temperature profile. The electron density profile is flat in the centre and falls nearly linearly to zero near the plasma edge. There is a uniform central plasma with radius ~ 5 cm and length ~ 80 cm. As the diffusion layer width a is increased from 0.9 to 2.0 mm, the electron confinement improves, but ion confinement degrades, due to the increase of $\Delta\Phi$. There is also an increased probability of arcing with large gap widths, due to anode bombardment and outgassing. At the optimum width $a_{opt} = 1.6$ mm the maximum plasma density $n_e = 10^{18} \text{ m}^{-3}$ is attained. The electron confinement time deduced from the total number of electrons in the plasma divided by the total electron diffusion loss current is $\tau_e = 3$ ms. Future plans are to increase the magnetic field to $1\text{--}2$ T, and to inject hot plasma with a plasma gun.

3.6 Impurities

Impurity effects in MEPC devices have been studied very little. Lavrent'ev⁹⁴ showed the theoretical effect of increasing Z_{eff} on the energy confinement time. However, nobody has computed impurity source terms, transport and build-up.

A continuous impurity accumulation was observed in the ATOLL device during the injection pulse. A typical impurity level was $1\text{--}2\%$ with the dominant species at mass 28.¹⁵⁹ The addition of a few per cent impurity extinguished the 'emission free' regime of ATOLL.¹⁶⁰ There have been almost no studies of impurity profiles, impurity transport, radiative power loss or methods of impurity removal from an MEPC plasma. Impurity studies need greater emphasis in the future. As Gormezano³⁹ stated, "any electrostatic system will constitute a very

good containment system for heavy impurities. The presence of electrodes in environments with high electric fields and high particle fluxes may constitute a very large source of impurities. This might ultimately be the greatest problem."

3.7 Comparison of Experiments

Key parameters of various MEPC experiments are summarized in Table 2. In some cases the effective temperature is taken to be two-thirds of the average particle energy. The early experiments at Kharkov (S-1, S-3, S-3M and S-4M), Quebec, Missouri and Jutphaas were small spindle cusp plasmas with weak fields, and neutral gas effects were dominant. Such experiments are of less interest now, but they served to demonstrate the principles of MEPC. The multiple point cusp SCIF device was shut down by budget cuts before reaching its projected operating parameters, but it may be restarted at another laboratory.

The Jupiter-1A device achieved good ion and electron temperatures ($0.4\text{--}1.5$ keV). It also demonstrated the effectiveness of electron cyclotron heating, although at low powers. The Jupiter-1M experiment was not able to fully utilize its high magnetic fields, because the duration of the peak field was too short to permit accumulation of high plasma density. Due to their low ratios of plasma volume to surface area $V/SR \leq 0.03$, spindle cusps are not worthwhile considering for future experiments.

The linear multipole devices demonstrated confinement in that geometry and validated theoretical predictions of critical loss angles. Due to end losses, these devices did not achieve high plasma pressures.

The ATOLL toroidal quadrupole was carefully built and operated, but the electron energy transport was anomalous. Detailed studies related the anomalous transport to the lower hybrid drift instability (plasma edge) and to the ion acoustic instability (plasma interior). ATOLL was shut down in the 1980s.

The Jupiter-2M experiment has attained the most promising results. Its demonstration of near-classical transport is stimulating interest in MEPC research.

3.7.1 Density, Temperature and Confinement Time Scalings

The plasma density in spindle cusps was typically 10^{17} to 10^{18} m^{-3} . The attainment of higher plasma density has been a major concern for the reactor prospects of MEPC devices. The plasma density appears to scale proportional to B^2 ,¹²² provided that the magnetic field duration is long enough for density accumulation. The central plasma density n_e is found to be significantly higher than the electron density n_{ea} in the anode region,

but more definitive measurements of the ratio n_e/n_i are needed at high plasma temperatures.

The measured electron energy distributions resemble shifted Maxwellians, as expected. Computer models indicate that, if neutral gas effects are not dominant, the plasma temperatures scale proportional to the applied voltage. Measured ion temperatures have scaled linearly with Φ_A . For the plasma density and temperature in MEPC devices, we assume the following scaling

$$n \propto B^2 \quad (57)$$

$$T_e \approx T_i \approx 0.05 \Phi_A \quad (58)$$

The scalings were used to estimate the hypothetical reactor parameters in Tables 1 and 2. That the temperatures in Jupiter-2M were below this assumed scaling may be due to the short duration of the peak magnetic field, the weak heating power and neutral gas effects.

For small spindle cusp devices the confinement times have been $\tau \sim 0.1$ to 1 ms. Little distinction has been made experimentally between particle confinement and energy confinement. For ring cusps the confinement time is assumed to scale roughly in accordance with equation (40)

$$\tau_{diff} \approx 0.09 \frac{\tau_{ei} a R}{\rho_b \rho_a} \quad (40)$$

This equation predicts $\tau_{diff} \approx 0.8$ ms for Jupiter-2M parameters of Table 2. The experimentally measured confinement time was 2-3 ms. (If the central electron temperature were higher than the 15 eV reported from a Langmuir probe under the magnet coils, then the theoretical τ_{diff} would be longer.) A more precise computation specific to the Jupiter-2M geometry¹⁷³ predicts classical confinement times about twice the measured value.

Table 2A — Parameters of some MEPC Experiments. (*Italicized values are estimates*)

Spindle Cusps	Reference	<i>R</i> (cm)	<i>a</i> (mm)	<i>B_e</i> (T)	<i>Φ_A</i> (kV)	<i>n</i> (m ⁻³)	<i>T_e</i> (keV)	<i>T_i</i> (keV)	<i>τ</i>	<i>a/p_e</i>	<i>β_e</i>	<i>v_e τ/R</i>
S-1, Kharkov	5	5	1.5	0.4	2.0	3.0 x 10 ¹⁷	0.27	0.16	4.0 x 10 ⁻⁵	11	0.032	7.8 x 10 ³
S-3 and S-3M, Kharkov	81	10	1.5	0.6	5.0	4.0 x 10 ¹⁷	0.50	0.34		12	0.038	
S-4M, Kharkov	130	10	1	0.25	1.0	1.0 x 10 ¹⁷					0.054	
KEMP-II, University of Quebec	135	17	1	0.5	6.0	4.0 x 10 ¹⁷	1.0	0.30	5.0 x 10 ⁻⁴	5	0.084	5.5 x 10 ⁴
University of Missouri	122	16	1.5	0.3	5.0	2.0 x 10 ¹⁶	0.50	0.10	5.0 x 10 ⁻⁴	6	0.005	4.1 x 10 ⁴
Jutphaas	127	18		0.13			0.20		1.0 x 10 ⁻⁴			4.7 x 10 ³
Jupiter-1A, Kharkov	131, 138	23	1.5	0.65	6.0	3.0 x 10 ¹⁷	1.50	0.40	3.0 x 10 ⁻⁴	7	0.054	3.0 x 10 ⁴
Jupiter-1M, Kharkov	137, 147	10	1.5	1.7	8.0	1.0 x 10 ¹⁸	0.10	0.05	5.0 x 10 ⁻⁴	76	0.002	3.0 x 10 ⁴

Table 2B — Parameters of some MEPC Experiments. (*Italicized values are estimates*)

	Reference	R (cm)	a (mm)	B_0 (T)	Φ_A (kV)	n (m ⁻³)	T_e (keV)	T_i (keV)	τ	a/p_e	β_e	$v_e \tau/R$
Linear multipole, $m = 4$, Kharkov	75	5	1.5	0.15	1.0							
Linear multipole, $m = 8$, Kharkov	153, 154	6	1	1.2	1.0	$\times 10^{17}$	0.50	0.30	5.0×10^{-5}	16	0.002	1.1×10^4
Toroidal quadrupole, ATOLL	158, 154	20	1	1.5	1.7	$\times 10^{17}$	0.03	0.07	1.8×10^{-4}	81	0.001	5.3×10^3
Multiple point cusps, SCIF	104, 158	92		0.2	10							
Linear set of ring cusps, Jupiter-2M, Kharkov	173	22	1.6	0.6	2.5	$\times 10^{18}$	0.015	0.03	3.0×10^{-3}	74	0.005	3.1×10^4
Hypothetical reactor, Linear set of ring cusps		400	2	6.0	400	$\times 10^{20}$	20	20	6	25	4.5	1.7×10^8

3.7.2 Dimensionless Parameters

Three dimensionless parameter ratios are listed in Table 2: a/p_e , β_e , and $v_e \tau/R$. The a/p_e represents the number of electron Larmor radii within one-half of the ring cusp anode gap. In MEPC experiments this number has ranged from 5 to 100, and for a reactor it would probably be in the order of 20–30. The optimum anode gap width is of the order of 1.5 to 2 mm, and the electron Larmor radius is fixed by the magnetic field and electron temperature in a reactor to values of the order of 30–100 μm .

The second dimensionless parameter is the ratio of average plasma pressure to the peak magnetic field pressure at the coil where β_e is the peak magnetic field at the coil $\approx \beta_a$.

$$B_c \equiv 2\mu_0 n k \frac{(T_e + T_i)}{B_c^2} \quad (59)$$

(In magnetic confinement fusion it is more common to define beta relative to the vacuum magnetic field at the plasma centre, but that central magnetic field is zero in magnetic cusps, which would yield an infinite value of beta.) The values of β_e in past MEPC experiments have been very low, of the order of 0.001 to 0.1 %. Using the density and temperature scalings of equations (57) and (58) results in $\beta_e = 4.5\%$ for the hypothetical reactor of table 2. For comparison, the estimated value for the ITER tokamak (Troyon coefficient $g = 3$, $I = 24$ mA, minor radius = 3 m, $B = 6$ T, $B_c = 13$ T) is $\beta_e = 0.85\%$.

The third dimensionless parameter in table 2 is $v_e \tau/R$, which is the ratio of the confinement time to the approximate electron transit time through the plasma.

Present experiments attain confinement values of about 10^4 transit times. Without effective plugging, the plasma would only be confined for tens of transit times.

This number of transit times is relevant to a mode of free plasma flow out cusp gaps. It is less relevant to MEPC devices, because ions are confined electrostatically, and their confinement times are roughly equal to the electron cross-field diffusion time. Nevertheless, it is instructive to show that if the ions were freely flowing out cusp gaps, those gaps would be very narrow. According to the free-flow model, the ion confinement time is

$$\tau = \frac{r_p^2 L_1}{u R \delta} \quad (6)$$

For Jupiter-2M, $R = 0.22$ m, $r_p \approx 0.1$ m, $L_1 = 0.105$ m, $u \approx 7.6 \times 10^4$ ms⁻¹ and $\tau \approx 3$ ms. Using this equation we estimate the effective cusp gap half-width $\delta \approx 2.1 \times 10^{-5}$ m. Since the electron Larmor radius $p_a = 2.2 \times 10^{-5}$ m, it is seen that $\delta \approx p_a$. If free ion flow were occurring, it would be through a very narrow gap.

3.7.3 Anomalous Transport

The diocotron instability in the ring cusp regions is believed to play a beneficial role by removing anode-trapped cold electrons, which tend to screen out the anode potential, but other instabilities have deleterious effects. The ATOLL toroidal quadrupole cusp experiment had anomalous transport (hundreds of times faster than classical) in all operating regimes, associated with the long-wavelength ion acoustic instability and the lower hybrid drift instability. The Jupiter-2M multiple ring cusp experiment, however, has demonstrated nearly classical electron transport. So far, the reason for the

difference is not understood. There are several hypotheses, as follows:

- (i) In Jupiter-2M directed electron injection from thermoelectric cathodes was used. According to Lavrent'ev,¹ electron injection in ATOLL by secondary emission from the cathodes introduced electrons into the diffusional layer (rather than into the central Brillouin region), which could foster the two-stream instability. The rate of electron production was two orders of magnitude greater than the electron loss rate by classical diffusion, so classical diffusion could not accommodate the required outflow rate of spent electrons from the trap.
- (ii) ATOLL has two-dimensional curvature and only toroidal symmetry in the anode regions, while Jupiter-2M has one-dimensional curvature and (since $b \gg a$) approximately two degrees of symmetry. This lack of symmetry in ATOLL might be more conducive to growth of the harmful instabilities, such as the lower hybrid drift waves; or it might somehow tend to reduce the beneficial effects of diocotron oscillations on cold electrons within the anodes.
- (iii) The large volume of field-free plasma in Jupiter-2M may serve to damp the growth of instabilities.

More study will be required to falsify or confirm these hypotheses.

3.7.4 Assessment

MEPC experiments typically have had small radii $R \sim 10$ to 20 cm and plasma volume < 11 , except for Jupiter-2M (501) and the SCIF device. The anode gap half-width ranges from 1 to 2 mm. A larger gap could permit excessive voltage sag $\Delta\phi$, and a smaller gap would decrease the electron diffusion loss time. The magnetic fields have generally been below 1 T, except for a few pulsed experiments. The applied voltage has been below 10 kV.

Many excellent measurements have been performed in MEPC devices. Detailed probe measurements have shown that the electron density profile in the ring cusp anode has a half-width about one Larmor radius. The electrostatic potential profile has been mapped out with pulsed ion beam transmission measurements and gridded energy analyzers. A deep negative potential well has been sustained for many milliseconds. The electron velocity distribution resembles a shifted Maxwellian, as expected. These measurements verify the basic theory of MEPC.

The scalings of density, temperature and confinement time have been established within the current ranges of

parameters. The confinement in some experiments is nearly classical, when neutral gas effects are taken into account. The diocotron oscillations in the ring cusps have been thoroughly studied and are well understood. The plasma waves associated with anomalous transport in ATOLL have been correlated with theoretical predictions.

Why some devices have anomalous transport and others do not is not yet understood. More measurements are needed of the density and temperature profiles, impurity distribution and transport, neutral gas distribution, radiation losses and heat propagation. Two-dimensional computer simulations are needed to provide a link between analytic theory and experimental data.

A common thread of deficiencies links almost all the past MEPC experiments: either weak or short-duration magnetic fields; relatively low voltages (< 10 kV); weak plasma heating; incomplete diagnostics; inadequate computer modeling. These deficiencies have been caused by low budgets, not by failures, of the experimenters.

Table 3 compares the parameters of Jupiter-2M with the proposed Jupiter-2 and Jupiter-T devices. If successful, Jupiter-T could demonstrate the attainment of thermonuclear parameters in a modest-sized device.

4. Reactor Concepts

Various cusp geometries suitable for electrostatic plugging were illustrated in Figure 8. Mirror geometries, such as a yin-yang field, are also possible for electrostatic plugging, but the plasma volume inside the anode-bounded flux surface is smaller than for cusp systems.

4.1 Reactor Design Studies

Table 3 — Comparison of Jupiter-2M, Jupiter-2, and Jupiter-T experiments.¹⁷⁴

Parameter	Jupiter-2M	Jupiter-2	Jupiter-T
Ring cusps radius, R (m)	0.215	0.67	1.4
Length between ends, L (m)	1.4	3.9	6.4
Ring cusp magnetic field, B_a (T)	0.5	2.5	4.0
Point cusp magnetic field, B_z (T)	1	5	8
Applied voltage, Φ_A (kV)	2.5	25	100
Electron injection current, I_e (A)	0.2	5	30
Plasma density, n_e (m^{-3})	0.8×10^{18}	3×10^{19}	10^{20}
Ion temperature, T (keV)	0.03	1	10
Plasma volume, V (m^3)	0.05	0.5	4
Electron diffusion current, I_{diff} (A)	1.6	14	120
Electron lifetime, τ (s)	0.002	0.36	1.3

Laurent^{ev175} considered several reactor geometries for MEPC reactors: a sphere, a cylinder and a torus. They would typically operate at $B_a = 7$ T, $\Phi_a = 200$ kV, $n_e \sim 10^{20} m^{-3}$, $T_i \sim 30$ keV, $V \sim 800 m^3$ and power density ~ 4 MW m^{-3} . They would provide intense sources of neutrons, which could be used for production of tritium or plutonium.

Pastukhov and Yushmanov^{176,177} estimated the power gain of an MEPC reactor. At each value of applied potential Φ_a there is a plasma temperature that maximizes Q . The optimum gap width makes $\Delta\Phi/\Phi_a \approx 0.25$. When the gap is wider, $\Delta\Phi$ becomes large, reducing the plugging potentials Φ_c and Φ_i . When the gap is narrower, electron diffusion losses are too great. At the optimum gap width, the ratio of fusion power to input power for a ring cusp plasma reduces to

$$Q \approx 10^{-5} \frac{\phi_A^2 B_a V}{S \sqrt{1 + \frac{n_t}{n_a}}} \quad (60)$$

where Φ_A is in kV and n_{eL} is the trapped electron density in the anode region. Assuming $n_{eL}/n_{ea} = 0.3$ and $V/SR \approx 0.3$ in the example case of table 1, it is found that $Q = 10$. This analysis did not include energy losses due to neutral gas and impurities, or the beneficial effect of the alpha-particle emission current helping to reduce the required cathode current. Alternatively, using the parameters of Table 1 with $Z_{eff} \approx 3$ in equations (4D1) and (3F14) of reference 44, we find $Q \approx 13$.

A spherical cusp, shown in Figure 8, would be advantageous from a physics standpoint.^{178,179} The sphere has the best surface-to-volume ratio, and the spherical electrode arrangement might provide some spherical focus-

ing of charged particles. If effective, such focusing could increase the central plasma density and decrease the required magnetic field in the cusps. However, particle scattering by waves and by Coulomb collisions and reflections off the scalloped boundary would tend to diminish the degree of focusing. It would be difficult to align the electrodes with the magnetic field lines in a spherical reactor.

A toroidal hexapole reactor design had $B_a = 8\text{ T}$, $\Phi_a = 300\text{ kV}$, $n_e = 10^{22}\text{ m}^{-3}$, $T = 17\text{ keV}$ and a neutron wall loading $= 1.6\text{ MW m}^{-2}$.⁸⁴ The direct capital costs estimated for this reactor were comparable to those for tokamak and tandem mirror reactors.¹⁸⁰

From the results with Jupiter-2M, it appears that ion losses from the point cusps are not a serious problem, so a linear set of ring cusps would be feasible for a reactor. Such a reactor would be superior to either the spherical cusp or toroidal hexapole cusp, because of its simplicity, lower structural mass and easier maintenance. A linear MEPC reactor, as illustrated in Figure 25, could have the parameters of table 1, with $Q \approx 10$, DT fusion power density $= 3\text{ MW m}^{-3}$, neutron wall loading $= 3.6\text{ MW m}^{-2}$, $L = 50\text{ m}$, and total fusion power $= 4.2\text{ GW}$.

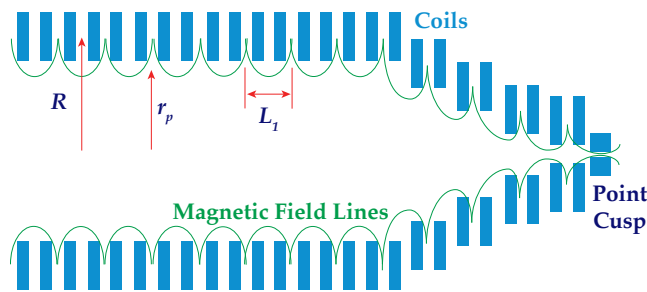


Figure 25 — One End of a Linear MEPC Reactor

Radiation collimators and voltage dividers would be used to prevent high voltage breakdown, as illustrated in Figure 26.

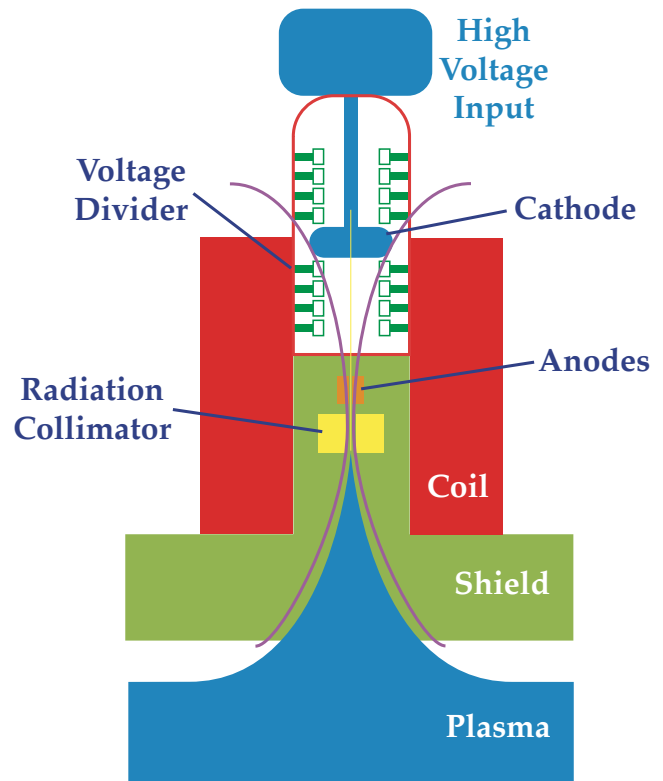


Figure 26 — Radiation collimator and voltage divider for high-voltage electrodes.

4.2 Applications

Besides power production, there are other potential applications for MEPC devices. Their good confinement of high-Z ions would make them well suited for stripping and confining heavy ions for accelerators, as suggested by Stix.^{181,182}

Nadler *et al*¹⁸³ have suggested that small inertial-electrostatic confinement (IEC) devices operating in the glow discharge mode at 30-50 kV could become useful low-cost neutron sources producing $>10^6$ DD neutrons/s for a variety of applications, including detector calibration, diagnostics and training. By increasing the voltage, current and size, and using DT fuel, yields of 10^{10} neutrons/s might be attainable. Such neutron sources could be stronger than ^{252}Cf sources (2.6 year half-life), and they would be simpler and cheaper than accelerator-based neutron sources.

Miley *et al*¹⁸⁴ found that IEC device operation in the 'star' discharge mode maximizes the effective grid transmission factor for ions. An IEC device using D^3He fuel could generate 14.7 MeV protons for production of positron-emitting radioisotopes that are useful for positron emission tomography facilities. Miley *et al*¹⁸⁵ proposed the use of high-voltage collectors in a 'venetian blind' configuration to convert the D^3He reaction product kinetic energy directly into electricity.

Miley *et al*¹⁸⁶ studied hydrogen production by radiolysis of water with 14.7 MeV protons from an IEC device. The 3.6 MeV alpha energy would be converted directly into electricity. The protons would pass through a thin chamber wall and interact with steam flowing through the cell, splitting about 13 water molecules per 100 eV of energy deposited by the protons. The steam would pass through a turbine to generate electricity, and then the hydrogen would be removed from the condensate. The overall system efficiency could be about 50%.

Bussard¹⁸⁷ suggested the use of an electron-beam-heated propellant thruster powered by an electrostatic plasma device for space propulsion. Miley *et al*¹⁸⁸ suggested the use of IEC engines with venetian blind energy converters to power five 68-N arcjet-magneto-plasma-dynamic thrusters with a specific impulse of 3000 s.

In pulsed operation, an IEC reactor with $R = 5.25$ m and mass = 5 t could deliver 12 MW of power to the thruster.¹⁸⁹ Bussard¹⁹⁰ proposed the use of a Polywell IEC reactor for space propulsion.

An MEPC plasma with $T = 10^{-20}$ keV would be a good target for neutral beam injection at $W_i = 150$ keV with a beam ion fusion probability $\sim 10^{-2}$.¹⁹¹ Such a device could serve as a powerful neutron source for isotope production, medical therapy or materials testing.

5. Issues of MEPC

Although some recent confinement results appear promising, there are still many issues to be resolved before MEPC devices can become fusion reactors, as discussed below.

5.1 Self-Shielding of Applied Potentials

The potential drop in point cusp anodes is very large, but point cusp ion losses can be kept low by the centrifugal and magnetic field gradient forces, as demonstrated in Jupiter-2M. At $B \leq 6$ T, values of $n_a \leq 1.5 \times 10^{19} \text{ m}^{-3}$ are required to keep $\Delta\phi \leq 100 \text{ kV}$ in the ring cusps. The potential sagging in the anode means that high applied voltages are needed to ensure substantial ϕ_e and ϕ_i .

5.2 Neutral Gas Effects

Neutral gas increases cross field transport rates and promotes high-voltage breakdown. The plasma tends to act as a vacuum pump, and in future large MEPC devices the neutral gas effects should be less dominant than in small spindle cusps. Nevertheless, there will always be substantial recycling of hydrogen isotopes and helium off the walls, so shields should be used to prevent excessive flow of neutral gas to the anode regions, where build-up of cold trapped electrons would increase $\Delta\phi$. High-speed vacuum pumping will be required in the electrode region.

5.3 Electrodes

Optimized plasma confinement by careful alignment of each anode was demonstrated in Jupiter-2M. Radiation shields and voltage dividers will be needed to sustain voltages $\phi_A > 200 \text{ kV}$. To avoid warping, the anodes should be actively cooled and made from materials with low thermal expansion. Although high-voltage holding in radiation fields must still be demonstrated in MEPC devices, the PSP-2 rotating plasma experiment¹⁹² has demonstrated the sustainment of 400 kV applied voltage with hot plasma present.

5.4 Transport

The reason why Jupiter-2M had good confinement and ATOLL had anomalous transport is not yet understood. Transport in MEPC devices has been studied much less than transport in tokamaks and tandem mirrors, so this lack of understanding is not surprising. Several hypotheses have been suggested: the effect of the electron injection

method, the effects of curvature and symmetry, and the effect of a large volume of field-free plasma. The extension of the good confinement to larger devices remains to be tested experimentally. A more powerful experiment is being designed to test the scaling relations at higher values of plasma density, temperature and confinement time.

5.5 Power Gain Ratio

The estimated power gain ratio for an MEPC reactor with nearly classical fuel ion confinement (but no alpha-particle confinement), $\phi_A = 400 \text{ kV}$, $B_a = 6 \text{ T}$, $R = 4 \text{ m}$, is $Q \approx 10$. The power gain ratio could be increased by the following means: increasing the applied voltage; increasing the magnetic field; increasing the plasma volume; improving alpha energy confinement.

One means of improving alpha confinement would be to add a modest toroidal field to a toroidal multipole device (similar to the Tormac configuration).¹⁹³ The toroidal field would help to confine alpha-particle energy, facilitating ignition, and the resultant magnetic shear might help to stabilize the lower hybrid drift instability in the plasma edge layer.¹⁹⁴ Another possibility might be the addition of a weak longitudinal magnetic field underneath the surface cusp field of a linear set of ring cusps.

5.6 Plasma Impurities

Since alpha particles are poorly confined, helium ash accumulation could be slower than in tokamaks. However, sputtered wall atoms which penetrate into the plasma core would be well confined. Impurity ion accumulation would dilute the fuel density, cool the electrons by radiation losses and diminish the potential well depth. One means for impurity removal might be to use the centrifugal force of their rotation in a weak longitudinal field to expand their orbits so that a pumped limiter could extract them. Another possibility would be to expand the point cusp hole at one end of a linear reactor and to flow in fresh fuel from the other end, so that the weak pressure gradient gradually moved impurities to the hole. If effective impurity removal methods could not be found, then periodic shutdowns might be required for impurity removal, followed by restarts with fresh fuel.

5.7 Materials Issues

The wall activation, after-heat, accidental release of radioactivity and waste disposal issues of MEPC reactors would be comparable to those of tokamaks and other magnetic confinement devices. The reactor design should provide for rapid replacement of damaged walls and electrodes. The desirable first wall neutron power

flux would probably be about $2\text{--}5\text{ MW m}^{-2}$. Higher values could cause heat removal and wall lifetime problems, and lower values would raise the cost of electricity. The anodes should be partially shielded from radiation, and the electrodes and walls must be actively cooled. Low-activation materials, such as purified vanadium chromium alloys and SiC, should be used if feasible.

One possible materials combination for an MEPC reactor is vanadium alloy structure with a circulating Flibe (LiF-BeF_2) molten salt blanket and coolant. Use of the molten salt would avoid the reliability problems of high-pressure coolants and the fire hazard of lithium. A small amount of lithium could be used to cool first-wall hot spots, if needed. The irradiated vanadium alloy could be cooled for tens of years, then remelted to remove the volatile long-lived isotopes (mostly ^{42}Ar) and recycled.¹⁹⁵ With careful choice of materials, an MEPC reactor would not require active safety systems to prevent prompt off-site fatalities in the event of a serious accident.

6. Conclusions and Recommendations

- (i) Purely electrostatic plasma confinement with spatial and temporal focusing may be worth re-examination (section 1.1.4).
- (ii) Due to magnetic reflection and electrostatic acceleration effects, the central plasma density in an MEPC device may be an order of magnitude higher than the electron density in the ring cusp region. Cold electrons from ionization of neutral gas tend to screen out the anode potential, but they are probably removed from ring cusps by diocotron oscillations (sections 2.5 and 2.6).
- (iii) Although anomalous transport was observed in the ATOLL toroidal quadrupole device, the plasma loss rate in the Jupiter-2M linear ring cusp experiment was only about twice the classical rate, improving at higher density. The reason for the good stability of the Jupiter-2M plasma is not yet understood, but might be related to its method of electron injection, its better symmetry, or its large volume of uniform field-free plasma (section 3.7.3).
- (iv) Based on present experimental results, a linear set of ring cusps appears to be the most favorable configuration for an MEPC reactor.
- (v) Several decades of small, cheap, pulsed experiments have demonstrated the basic principles of MEPC, but these experiments have been marred by weak or pulsed magnetic fields, low voltages, weak plasma heating, incomplete diagnostics and inadequate computer modeling (section 3.7.4). Further progress depends upon increasing R , B and Φ_A in a steady-state device, so that n , T and τ_E can approach the thermonuclear regime. A new experiment is needed to demonstrate the attainment of interesting parameters ($n > 3 \times 10^{19} \text{ m}^{-3}$, $T > 5 \text{ keV}$) in a steady-state device with intermediate size ($R \approx 2 \text{ m}$, $L \approx 10 \text{ m}$) and reasonable applied fields ($B \approx 5 \text{ T}$, $\Phi_A \approx 100 \text{ kV}$).
- (vi) For an MEPC reactor with near-classical transport, values of $Q \approx 10$ are predicted at voltages $\Phi_A \approx 400 \text{ kV}$ (section 4.1). Q could be enhanced by partial confinement of alpha particles.
- (vii) The Polywell and modified Penning trap concepts are just beginning to be studied. They need more research to determine the attainable degree of focusing and to explore related concepts that may lead to attractive fusion reactors (sections 2.10, 2.11).
- (viii) Radiation shields and voltage dividers should be used to prevent high voltage breakdown. Voltage holding at 400 kV has been demonstrated in a magnetic mirror geometry by the PSP-2 rotating plasma experiment (section 5.3).
- (ix) MEPC devices may find applications as (section 4.2): electrical power plants; heavy ion sources; neutron sources for materials testing, medical therapy and isotope production.
- (x) The main issues of concern for MEPC reactor development are: electron transport, plasma purity and electrode alignment and voltage holding. Future research should concentrate on resolving these issues.

Acknowledgments

This review is dedicated to Oleg A. Lavrent'ev who has led this field of research steadily for four decades, in spite of many difficulties. Robert W. Bussard provided information on the Polywell concept, and L. Turner, D. C. Barnes and Richard A. Nebel provided information on the modified Penning trap research. This work was supported by the US Department of Energy, Office of Fusion Energy, under DOE Idaho Field Office Contract number DOE-AC07-76ID01570.

Publication History

Received 20 December 1993, in final form, 25 March 1994.

Reformatted and color illustrations added in April 2009 by Mark Duncan.

Footnotes

¹ Oleg A. Lavrent'ev; 1992 unpublished letter to Thomas James Dolan, 17 October 1992

² Philo T. Farnsworth; "Electric Discharge Device for Producing Interactions Between Nuclei," U.S. Patent Number 3,258,402 (June 28, 1966).

³ Oleg A. Lavrent'ev; 1963 Ukrain. Fiz. Zh. 8, 440-445

⁴ G. I. Budker; 1961, *Plasma Physics and the Problem of Controlled Thermonuclear Reactions I* (Elmsford, NY: Pergamon) pp. 295-301

⁵ Oleg A. Lavrent'ev; 1968, "Investigation of an electromagnetic trap," *Magnitnye Lovushki Vypusk 3* (Kiev: Naukova Dumka) pp 77-147 (translation: AEC-TR-7002 (Rev))

⁶ Robert L. Hirsch; 1970, US Patent 3,530,036

⁷ Thomas James Dolan; J. T. Verdeyen; B. E. Cherrington; D. J. Meeker; 1970, "Electrostatic-Inertial Plasma Confinement," US Air Force Office of Scientific Research Report AFOSR-70-1656TR

⁸ Oleg A. Lavrent'ev; V. A. Sidorkin; B. V. Zaitsev; V. P. Goncharenko; L. I. Ovcharenko; 1972 Ukrain. Fiz. Zh. 42, 143-6

⁹ Oleg A. Lavrent'ev; V. A. Sidorkin; B. V. Zaitsev; Yu S. Azovskii; 1972, Ukrain. Flz. Zh. 46, 1282-4

¹⁰ S. Yu; S. Azovskii; B. V. Zaitsev; Oleg A. Lavrent'ev; N. N. Sappa; V. A. Sidorkin; 1976, "Generation and focusing of ions from a source with distributed parameters," Report 76-9 (Institute of Physics and Technology, Ukrainian Academy of Sciences, Kharkov)

¹¹ Oleg A. Lavrent'ev; V. A. Sidorkin; B. V. Zaitsev; Azovskii; S Yu; 1976, Zh. Tekh. Fiz. 46 1282-4

¹² Oleg A. Lavrent'ev; V. A. Sidorkin; B. V. Zaitsev; N. N. Sappa; 1973, "Investigation of gas discharge in a spherical diode," Proceedings 11th International Conference on Phenomena in Ionized Gases (Prague), (Prague: Czechoslovak Academy of Science)

¹³ Robert L. Hirsch; "Experimental studies of a deep, negative, electrostatic potential well in spherical geometry," 1968, *Physics Fluids*, 11, 2486-90

¹⁴ William C. Elmore, James L. Tuck, and Kenneth M. Watson; "On the inertial-electrostatic confinement of a plasma," 1959 *Physics of Fluids*, 2, 239-246

¹⁵ R. W. Hockney; 1968 *Journal Applied Physics* 39, 41 66-70

¹⁶ C. Barnes; 1973, "Computer simulation of electrostatic inertial confinement," Stanford University Report AD-763826

¹⁷ G. D. Porter; E. H. Klevans; 1971, *Physics Fluids*, 14428-34

¹⁸ Robert L. Hirsch; 1967, "Inertial-Electrostatic Confinement of Ionized Fusion Gases," *Journal Applied Physics*, 38, 4522-4534

¹⁹ K. M. Hu and E. H. Klevans, "On the Theory of Electrostatic Confinement of Plasmas with Ion Injection," *Physics Fluids*, 17, 227-231 (1974)

²⁰ B. E. Cherrington; J. T. Verdeyen; D. A. Swanson; 1975, *Annals New York Academy Sciences*, 251139-51

²¹ D. A. Swanson; B. E. Cherrington; J. T. Verdeyen; 1973, *Physics Fluids* 16, 1939-45

²² D. A. Swanson; B. E. Cherrington; J. T. Verdeyen; 1973, *Applied Physics Letters*, 23, 125-6

²³ J. T. Verdeyen; B. E. Cherrington; D. A. Swanson; D. J. Meeker; 1975, *Annals New York Academy Sciences*, 251, 126-38

²⁴ D. J. Meeker; J. T. Verdeyen; B. E. Cherrington; 1973, *Journal Applied Physics*, 44, 5347-55

²⁵ G. Imel; 1973, Ph.D. Thesis, Pennsylvania State University

²⁶ W. M. Black; E. H. Klevans; 1974, *Journal Applied Physics*. 45 2502-11

²⁷ E. H. Klevans;; 1975, *Annals New York Academy Sciences*, 251 190-212

²⁸ W. M. Black; J. W. Robinson; 1974, *Journal Applied Physics*, 45 2497-501

²⁹ A. L. Gardner; D. M. Hatch; A. I. Y. Chan; R. P. Evans; 1975, *Annals New York Academy Sciences*, 251179-89

³⁰ D. C. Baxter; G. W. Stewart; 1982, *Journal Applied Physics*, S34597-601

³¹ J. M. Peterson; N. L. Oleson; 1992, *Physics Fluids*, B 4 888-901

³² J. H. Nadler; Y. B. Gu; George H. Miley; 1992, *Review Scientific Instruments*, 634810-12

- 33 George H. Miley; J. Nadler; T. Hochberg; Y. Gu; O. Barnouin; J. Lovberg; 1991, *Fusion Technology*, 19, 840-5
- 34 Robert L. Hirsch; G. A. Meeks; 1970, US Patent 3,530,497
- 35 Thomas James Dolan; J. T. Verdeyen; O. J. Meeker; B. E. Cherrington; 1972, *Journal Applied Physics*, 43, 1590-600
- 36 Oleg A. Lavrent'ev; "Electrostatic and Electromagnetic High-Temperature Plasma Traps," translated by T. J. Dolan, in *Electromagnetic Confinement of Plasmas and the Phenomenology of Relativistic Electron Beams*, L. C. Marshall and H. Sahlin, Editors, *Annals New York Academy Science*, 251, pp. 152-178 (1975).
- 37 B. I. Inanov; A. A. Kalmykov; Oleg A. Lavrent'ev; 1976, "On the possibility of initiating thermonuclear reactions by high-current ion beams," Report KhFTI 76-8 (Institute of Physics and Technology, Ukrainian Academy of Sciences, Kharkov)
- 38 D. W. Baldwin; 1977, *Review Modern Physics* 49, 317-39
- 39 C. Gormezano; 1979, *Nuclear Fusion*, 19, 1085-137
- 40 E. E. Yushmanov; 1985, *Nuclear Fusion*, 25, 1217-24
- 41 B. G. Logan; 1980, *Communications Plasma Physics Controlled Fusion*, 5, 271
- 42 R. Jones; 1984, *Proceedings 10th Symposium on Fusion Engineering*, (Philadelphia, PA, 6-9 December 1983) (Piscataway, NJ: IEEE) pp 1864-8
- 43 J. Kesner; S. F. Horne; V. P. Pastukhov; 1987, *Journal Fusion Energy*, 6, 401-11
- 44 Thomas James Dolan; 1982, *Fusion Research*, (Elmsford, NY: Pergamon)
- 45 R. Keller; I. R. Jones; 1966, *Z. Naturf.* 21, 1085-9
- 46 M. Sadowski; 1967, *Physics Letters*, 25a, 695-696
- 47 M. Sadowski; 1968, *Physics Letters*, 27a, 435-436
- 48 M. Sadowski; 1969, *Physics Letters*, 28a 626-627
- 49 M. Sadowski; 1969, *Reviews Scientific Instruments*, 40, 1545-9
- 50 M. Sadowski; 1970, *Journal Plasma Physics*, 4, 1-16
- 51 M. G. Haines; 1977, *Nuclear Fusion*, 17, 811-58
- 52 A. Marcus; G. Knorr; G. Joyce; 1978, "Two-dimensional simulation cusp confinement of a plasma," Report 78-55 (University of Iowa Department of Physics and Astronomy)
- 53 G. Knorr; D. Willis; 1982, *Z. Naturf.* 37a, 780-5
- 54 N. Hershkowitz; J. M Dawson; 1976, *Nuclear Fusion*, 16, 639-42
- 55 Oleg A. Lavrent'ev; L. I. Ovcharenko, B. G. Safronov; V. A. Sidorkin; 1966, *Ukrain. HZ. Zh.* 11, 982-90
- 56 Ralph W. Moir; 1968, "A new magnetic well configuration, importance of the mirror ratio and electrostatic containment of warm plasma," Report Eur-CEA-FC-496 (Fontenay-Aux-Roses, France)
- 57 J. D. Daugherty; L. Grodzins; G. S. Janes; R. H. Levy; 1968, *Physics Review Letters*, 20, 369
- 58 T. H. Stix; 1970, *Physics Reviews Letters*, 24, 135
- 59 T. H. Stix; 1971, *Physics Fluids*, 14, 692
- 60 T. H. Stix; 1971, *Physics Fluids*, 14, 702
- 61 R. Jones; 1989, *Journal Indian Institute Science*, 69, 373-6
- 62 R. Jones; 1990, *Philippine Journal Science*, 119, 171-82
- 63 E. E. Yushmanov; 1978, *Soviet Journal Plasma Physics* 4, 11-17
- 64 K. D. Marx; Thomas James Dolan; Ralph W. Moir; C. E. McDowell; 1976, *Bulletin American Physics Society* 21, 1044
- 65 R. H. Cohen; M. E. Rensink; T. A. Cutler; A. A. Mirin; 1978, *Nuclear Fusion* 18, 1229-43
- 66 V. P. Pastukhov; 1974, *Nuclear Fusion* 14, 3
- 67 V. Land Sizonenko; K. N. Stepanov; 1976, *Soviet Physics-Technical Physics* 20, 468-70
- 68 B. B. McHarg Jr.; M. E. Oakes; 1974, *Physics Fluids* 17, 1923-4
- 69 B. B. McHarg Jr.; M. E. Oakes; 1975, *Physics Fluids* 18, 1059-65
- 70 T. D. Rognlien; T. A. Cutler; 1980, *Nuclear Fusion* 20, 1003-11
- 71 P. B. Parks; A. M. Sleeper; 1984, *Physics Fluids* 27, 2890-8

- ⁷² E. E. Yushmanov; 1978, Soviet Journal Plasma Physics 4, 11-17
- ⁷³ D. P. Chernin; M. N. Rosenbluth; 1978, Nuclear Fusion 18, 47-62
- ⁷⁴ A. A. Ware; J. E. Faulkner; 1969, Nuclear Fusion 9, 353-61
- ⁷⁵ V. A. Sidorkin; Oleg A. Lavrent'ev; 1971, Plasma Physics and the Problem of Controlled Thermonuclear Fusion 2 (Kiev: Naukova Dumka) pp 247-51
- ⁷⁶ Ralph W. Moir; William L. Barr; Richard F. Post; 1971, Physics Fluids 14, 2531-2534
- ⁷⁷ M. Abramowitz; I. A. Stegun; 1966, Handbook of Mathematical Functions AMS-55 (Washington. DC: National Bureau of Standards)
- ⁷⁸ O. Buneman; R. H. Levy; L. M. Linson; 1966, Journal Applied Physics 37, 3203-22
- ⁷⁹ Yu I. Pankrafev; V. A. Naboka; E. F. Ponomarenko; Oleg A. Lavrent'ev; 1972, Nuclear Fusion 12, 391-3
- ⁸⁰ R. Hand Levy; R. W. Hockney; 1968 Physics Fluids 11, 766-71
- ⁸¹ Yu I. Pankrafev; V. A. Naboka; S. A. Vdovin; Oleg A. Lavrent'ev; A. A. Kalmykov; 1975, "Plasma Physics and the Problem of Controlled Thermonuclear Reactions 1 (3)," (Kharkov: Institute of Physics and Technology, Ukrainian Academy of Sciences) pp 4-21 (Translation: URCL-Trans-11142)
- ⁸² I. Ya Gordienko; V. D. Egorenkov; K. N. Stepanov; 1992, Soviet Journal Plasma Physics 18, 4-8
- ⁸³ E. E. Yushmanov; 1981, Nuclear Fusion 21, 329-3
- ⁸⁴ Thomas James Dolan; 1976, "Design study of electrostatically plugged cusp fusion reactor," Lawrence Livermore National Laboratory Report URCL-52142
- ⁸⁵ Thomas James Dolan; B. L. Stansfield; J M Larsen; 1975, Physics Fluids 18, 1383-6
- ⁸⁶ D. G. Blondin; Thomas James Dolan; 1976, Journal Applied Physics 47, 2903-6
- ⁸⁷ F. Brunei; G. Lafrance; H. Burkhardt; B. C. Gregory; 1974, Canadian Journal Physics 52, 2157-63
- ⁸⁸ J. P. Matte; G. Lafrance; 1977, Journal Computing Physics 23, 86-91
- ⁸⁹ M. Shoucri; J. P. Matte; B. C. Gregory; 1980, Canadian Journal Physics 58, 1216-29
- ⁹⁰ Thomas James Dolan; 1977, "Review of electrostatic plugging," Lawrence Livermore National Laboratory Report UCID-17576
- ⁹¹ V. P. Paslukhov; 1978, Soviet Journal Plasma Physics 43, 11-16
- ⁹² Thomas James Dolan; J. M. Larsen; B. L. Stansfield; 1975, Canadian Journal Physics 53, 2341-7
- ⁹³ K. Miyamoto; 1989, Plasma Physics for Nuclear Fusion revised edition, (Cambridge, MA: MIT Press)
- ⁹⁴ Oleg A. Lavrent'ev; 1981, Ukrain. Fiz. Zh. 26, 1466-72
- ⁹⁵ Oleg A. Lavrent'ev; 1981, Ukrain. Fiz. Zh. 26, 1636-41
- ⁹⁶ V. V. Dolgoplov; Oleg A. Lavrent'ev; N. N. Sappa; 1982, Soviet Journal Plasma Physics 8, 740-3
- ⁹⁷ V. P. Pastukhov; 1980, Soviet Journal Plasma Physics 6, 549-54
- ⁹⁸ V. I. Il'gisonis; V. P. Pastukhov; 1981, "Transverse electron losses in a magneto-electrostatic trap at low plasma pressures," Report IAE-3495/6 (Kurchatov Institute of Atomic Energy, Moscow)
- ⁹⁹ Thomas James Dolan; B. L. Stansfield; 1973, Nuclear Fusion 13, 960-2
- ¹⁰⁰ Thomas James Dolan; 1975, Annuals New York Academy Science, 251, 358-66
- ¹⁰¹ V. I. Karpukhin; Oleg A. Lavrent'ev; N. N. Sappa; 1978, Ukrain. Fiz. Zh. 23, 1294-300
- ¹⁰² V. I. Karpukhin; Oleg A. Lavrent'ev; N. N. Sappa; 1980 Ukrain. Fiz. Zh. 25, 1082-8
- ¹⁰³ Robert W. Bussard; "Some Physics Considerations of Magnetic Inertial Electrostatic Confinement: a New Concept for Spherical Converging-Flow Fusion," 1991, Fusion Technology 19, 273-293
- ¹⁰⁴ Nicholas A. Krall; "The Polywell: A Spherically Convergent Ion Focus Concept," 1992, Fusion Technology 22, 42-49
- ¹⁰⁵ J. Watrous; Nicholas A. Krall; K. Wong; 1991, Bulletin American Physics Society 36, 2318
- ¹⁰⁶ Nicholas A. Krall; K. Wong; V. Stefan; 1991, Bulletin American Physics Society 36, 2319
- ¹⁰⁷ Robert W. Bussard and Katherine E. King, "Phenomenological Modelling of Polywell /SCIF Multi-Cusp Inertial Electrostatic Confinement Systems," Bulletin American Physics Society, 36, 2319 (1991)

- ¹⁰⁸ Katherine E. King and Robert W. Bussard, "EKXL: A Dynamic Poisson-Solver for Spherically-Convergent Inertial-Electrostatic Confinement Systems," paper 2T11, Annual Meeting Division of Plasma Physics, APS, Tampa, FL, Nov. 4-8, 1991, Bulletin American Physics Society, Volume 36, 2319 (1991) EMC2-1191-03
- ¹⁰⁹ Thomas James Dolan; 1993, Fusion Technology 24, 128-129
- ¹¹⁰ A. B. Mikhailovskii; 1974, Theory of Plasma Instabilities, (New York: Consultants Bureau)
- ¹¹¹ Robert W. Bussard; 1992, unpublished letter to Thomas James Dolan, 14 July 1992
- ¹¹² D. C. Barnes; L. Turner; 1992 Physics Fluids B 4, 3890-1
- ¹¹³ L. Turner; D. C. Barnes; 1993, Physics Review Letter 70, 798-801
- ¹¹⁴ D. C. Barnes; Richard A. Nebel; L. Turner; 1993, Physics Fluids B 5, 3651-60
- ¹¹⁵ G. Miyamaoto; G. Iwata; Sand-Inoue K Mori; 1957, Journal Physics Society Japan 12, 438
- ¹¹⁶ D. C. Barnes; Richard A. Nebel; L. Turner; T. N. Tiouririne; 1993, Plasma Physics Control. Fusion 35, 929-40
- ¹¹⁷ T. N. Tiouririne; Land Turner; A. W. C. Lau; 1993, Physics Review Letters 72, 1204-7
- ¹¹⁸ L. Turner; T. N. Tiouririne; A. W. C. Lau; 1993, Journal Mathematical Physics 35, 2349-56
- ¹¹⁹ J. L. Hilton; C. K. Hinrichs; A. A. Ware; 1968, Plasma Physics 10, 455-6
- ¹²⁰ Oleg A. Lavrent'ev; V. A. Potapenko; I. A. Stepanenko; 1976, Soviet Physical-Technology Physics 2163-6
- ¹²¹ Yu I. Pankrat'ev; N. A. Tulin; E. F. Ponomarenko; V. A. Naboka; 1973, Atomnaya Energiya 35, 253-7
- ¹²² Yu I. Pankrat'ev; M. G. Nozdrachev; Oleg A. Lavrent'ev; B. G. Safronov; V. A. Naboka; E. F. Ponomarenko; 1972, Atomnaya Energiya 32, 131-6
- ¹²³ R. L. Hayward; Dolan Thomas James; 1977, Physics Fluids 20, 646-8
- ¹²⁴ Oleg A. Lavrent'ev; 1978, Ukrain. Fiz. Zh. 23, 1922-31
- ¹²⁵ Oleg A. Lavrent'ev; L. I. Ovcharenko; B. A. Shevchuk; 1975, "Plasma Physics and the Problem of Controlled Thermonuclear Reactions 1 (3)." (Kharkov: Institute of Physics and Technology, Ukrainian Academy of Sciences) pp 22-8 .
- ¹²⁶ Yu I. Pankrat'ev; V. A. Naboka; M. G. Nozdrachev; E. F. Ponomarenko; Oleg A. Lavrent'ev; B. G. Safronov; 1971, Atomnaya Energiya 31, 274-80
- ¹²⁷ K. Sugisaki; 1968, Japan Journal Applied Physics 7, 1387-96
- ¹²⁸ W. Strijland; 1970, Physica 47, 617-25
- ¹²⁹ Y. Nishida; S. Kawamata; K. Ishii; 1977, Journal Physics Society Japan 43, 1364-70
- ¹³⁰ S. A. Vdovin; V. I. Karpukhin; Oleg A. Lavrent'ev; M. Nand Novikov; V. A. Sidorkin; 1984, Ukrain. Fiz. Zh. 29, 836-41
- ¹³¹ A. O. Komacov; Oleg A. Lavcenrev; V. A. Potapenko; A. I. Skibenko; I. A. Stepanenko; I. P. Fomin; 1981, Teplofiz Vysok. Temp. 19, 614-18
- ¹³² Yu G. Zaleskii; A. D. Komarov; Oleg A. Lavrent'ev; V. A. Naboka; N. I. Nazarov; V. A. Potapenko; Stepanenko, I. A; 1979, Soviet Journal Plasma Physics 5, 532-4
- ¹³³ I. A. Stepanenko; A. D. Komarov; 1984, Ukrain. Fiz. Zh. 29, 704-10
- ¹³⁴ A. D. Komarov; I. A. Stepanenko; 1980, Ukrain. Fiz. Zh. 25, 1432-5
- ¹³⁵ A. D. Komarov; Oleg A. Lavcenrev; V. A. Naboka; V. A. Potapenko; I. A. Stepanenko; 1980, Ukrain. Fiz. Zh. 25, 776-80
- ¹³⁶ B. L. Stansfield; J. M. Larsen; B. Bergevin; P. Couture; B. C. Gregory; 1976, Canadian Journal Physics 54, 1856-61
- ¹³⁷ A. V. Georgievskii; V. E. Ziser; Oleg A. Lavcenrev; M. G. Nozdrachev; D. P. Pogozhev; 1974, Soviet Atomic Energy 36, 408-10
- ¹³⁸ Yu S. Azovskii; V. I. Karpukhin; Oleg A. Lavrent'ev; V. A. Maslov; M. G. Novikov; M. N. Nozdrachev; A. I. Skibenko; I. P. Fomin; 1978, "Study of the single-gap electromagnetic trap," Jupiter 1M Report KhFTI 78-2 (Institute of Physics and Technology, Ukrainian Academy of Sciences, Kharkov)
- ¹³⁹ A. O. Komarov; Oleg A. Lavcenrev; V. A. Potapenko; I. A. Stepanenko; 1979, Soviet Physical-Technology Physics 24, 1060-2

- ¹⁴⁰ Yu S. Azovskii; Oleg A. Lavrent'ev; V. A. Maslov; M. G. Nozdrachev; 1985, *Ukrain. Fiz. Zh.* 30, 1669-71
- ¹⁴¹ Yu S. Azovskii; Oleg A. Lavrent'ev; V. A. Maslov; 1986, *Ukrain. Fiz. Zh.* 31, 1691-6
- ¹⁴² Yu S. Azovskii; Oleg A. Lavrent'ev; V. A. Maslov; M. Nand Novikov; M. G. Nozdrachev; 1980, *Ukrain. Fiz. Zh.* 25, 1511-18
- ¹⁴³ Yu S. Azovskii; V. I. Karpukhin; Oleg A. Lavrent'ev; V. A. Maslov; M. Nand Novikov; M. G. Nozdrachev; 1980, *Soviet Journal Plasma Physics* 6, 142-6
- ¹⁴⁴ Yu S. Azovskii; Oleg A. Lavrent'ev; V. A. Maslov; M. N. Novikov; M. G. Nozdrachev; A. I. Skibenko; I. P. Fornin; 1981, *Ukrain. Fiz. Zh.* 26, 429-34
- ¹⁴⁵ Yu S. Azovskii; Oleg A. Lavrent'ev; V. A. Maslov; 1986, *Ukrain. Fiz. Zh.* 31, 1350-5
- ¹⁴⁶ Oleg A. Lavrent'ev; 1988, *Ukrain. Fiz. Zh.* 33, 1348-52
- ¹⁴⁷ Yu S. Azovskii; Oleg A. Lavrent'ev; V. A. Maslov; M. G. Nozdrachev; 1981, *Fiz. Plazmy* 7 968-72
- ¹⁴⁸ Yu S. Azovskii; Oleg A. Lavrent'ev; V. A. Maslov; M. G. Nozdrachev; 1984, *Fiz. Plazmy* 10, 1310-13
- ¹⁴⁹ Yu S. Azovskii; Oleg A. Lavrent'ev; V. A. Maslov; M. G. Nozdrachev; 1983, *Ukrain. Fiz. Zh.* 28, 213-18
- ¹⁵⁰ Yu S. Azovskii; Oleg A. Lavrent'ev; V. A. Maslov; M. G. Nozdrachev; 1984, *Soviet Journal Plasma Physics* 10, 369-70
- ¹⁵¹ Y. Nakamura; B. H. Quon; A. Y. Wong; 1975, *Physics Letter* 53a, 85-6
- ¹⁵² N. Hershkowitz; K. Hendricks; R. T. Carpenter; 1982, *Journal Applied Physics* 53, 4105-112
- ¹⁵³ Oleg A. Lavrent'ev; V. A. Sidorkin; V. P. Goncharenko; Yu S. Azovskii; 1974, "Electron injection and plasma confinement in a multigap electromagnetic trap," Report 74-3 (Institute of Physics and Technology, Ukrainian Academy of Sciences, Kharkov)
- ¹⁵⁴ Oleg A. Lavrent'ev; N. Nand Sappa; V. A. Sidorkin; 1976, *Ukrain. Fiz. Zh.* 21, 637-9
- ¹⁵⁵ Oleg A. Lavrent'ev; N. Nand Sappa; V. A. Sidorkin; 1977, *Ukrain. Fiz. Zh.* 22, 1741-44
- ¹⁵⁶ Oleg A. Lavrent'ev; N. Nand Sappa; B A Shevchuk; 1979, *Ukrain. Fiz. Zh.* 24, 1050-52
- ¹⁵⁷ Ralph W Moir; Thomas James Dolan; William L. Barr; 1977, "Design of an electrostatic end-plugged plasma-confinement device," *Proceedings 7th Symposium on Engineering Problems of Controlled Thermonuclear Research*, (Knoxville) (Piscataway, NJ: IEEE)
- ¹⁵⁸ K. C. Maffei; J. A. Lovberg; R. A. Jacobsen; 1991, *Bulletin American Physics Society* 36, 2318
- ¹⁵⁹ M. S. Ioffe; B. I. Kanaev; V. V. Pitserskii; E. E. Yushmanov; 1984, *Soviet Journal Plasma Physics*, 10, 261-7
- ¹⁶⁰ M. S. Ioffe; G. I. Kanaev; V. P. Pastukhov; V. V. Pitserskii; E. E. Yushmanov; 1981, *JETP Letters* 34, 570-3
- ¹⁶¹ M. S. Ioffe; B. I. Kanaev; V. V. Pitserskii; E. E. Yushmanov; 1984, *Soviet Journal Plasma Physics* 10, 268-75
- ¹⁶² M. S. Ioffe; B. I. Kanaev; V. P. Pastukhov; V. V. Pitserskii; R. Rand Chistyakov; E. E. Yushmanov; 1981, *Proceedings 10th European Conference on Controlled Fusion and Plasma Physics*, (Moscow) (Petit-Laney: EPS)
- ¹⁶³ M. S. Ioffe; B. I. Kanaev; V. P. Pastukhov; V. V. Pitserskii; E. E. Yushmanov; 1981, "Experiments in the Atoll device," *Proceedings 10th European Conference on Controlled Fusion and Plasma Physics*, (Moscow) (Petit-Laney: EPS)
- ¹⁶⁴ V. V. Pitserskii; R. R. Chistyakov; E. E. Yushmanov; 1983, "A study of plasma oscillations in the Atoll trap," *Zvenigorod Conference*, (Zvenigorod, USSR)
- ¹⁶⁵ M. S. Ioffe; V. I. Kanaev; V. P. Pastukhov; V. V. Pitserskii; R. Rand Chistyakov; E. E. Yushmanov; 1983, *Proceedings. 11th European Conference on Controlled Fusion and Plasma Physics*. (Aachen, Germany) (Petit-Laney: EPS) pp 261-2
- ¹⁶⁶ Oleg A. Lavrent'ev; 1988, *Ukrain. Fiz. Zh.* 33, 1348-52
- ¹⁶⁷ V. V. Pitserskii; V. P. Pastukhov; E. E. Yushmanov; 1987, *Soviet Journal Plasma Physics* 13, 29-35
- ¹⁶⁸ V. V. Pitserskii; V. P. Pastukhov; M. S. Ioffe; B. I. Kanaev; E. E. Yushmanov; 1988, "Problems of Atomic Science and Technology," (Series Thermonuclear Fusion 2) (Moscow: Kurchatov Institute of Atomic Energy) pp 50-2
- ¹⁶⁹ V. V. Pitserskii; V. P. Pastukhov; M. S. Ioffe; B. I. Kanaev; E. E. Yushmanov; 1988, *Soviet Journal Plasma Physics* 14, 94-100
- ¹⁷⁰ Oleg A. Lavrent'ev; 1979, *Ukrain. Fiz. Zh.* 24, 1019-23

- ¹⁷¹ S. A. Vdovin; Oleg A. Lavrent'ev; V. A. Maslov; M. G. Nozdrachev; V. P. Oboznyi; N. N. Sappa; 1988, "Problems of Atomic Science and Technology." (Series Thermonuclear Fusion 3) (Moscow: Kurchatov Institute of Atomic Energy) pp 40-5
- ¹⁷² S. V. Germanova; Oleg A. Lavrent'ev; V. I. Petrenko; 1989, "Transverse electron transport in a multicusp electromagnetic trap with axisymmetric magnetic fields," Problems of Atomic Science and Technology (Series Thermonuclear Fusion 3) (Moscow: Kurchatov Institute of Atomic Energy) pp 69-72
- ¹⁷³ S. V. Germanova; Oleg A. Lavrent'ev; V. I. Petrenko; 1991, "Cross-field transport of electrons in a multi-cusp electromagnetic trap across the end magnetic surfaces," Problems Of Atomic Science and Technology (Series Thermonuclear Fusion 2) (Moscow: Kurchatov Institute of Atomic Energy) pp 74-6
- ¹⁷⁴ S. A. Vdovin; S. B. Germanova; Oleg A. Lavrent'ev; V. A. Maslov; M. G. Nozdrachev; V. P. Oboznyi; V. I. Petrenko; N. N. Sappa; 1990, "Plasma accumulation and confinement in the Jupiter-2M multicusp electromagnetic trap," Proceedings All-Union Conference on Open Traps, (Moscow: Kurchatov Institute of Atomic Energy) pp 70-81
- ¹⁷⁵ Oleg A. Lavrent'ev; 1977, "Engineering and physics calculation of a powerful thermonuclear system based on an electromagnetic trap," Proceedings All-Union Conference on Engineering Problems of Thermonuclear Reactors 1, (Leningrad, 28-30 June) (Leningrad: Efremov Institute of Electrophysical Instruments) pp 106-13
- ¹⁷⁶ V. P. Pastukhov; E. E. Yushmanov; 1978, "A magnetoelectrostatic trap," Report IAE-3042 (Kurchatov Institute of Atomic Energy, Moscow)
- ¹⁷⁷ E. E. Yushmanov; 1980, Nuclear Fusion 20 3-8
- ¹⁷⁸ Oleg A. Lavrent'ev; A. A. Kalmykov; A. V. Georgievskii; V. Ye Ziser; V. B. Yuferov; 1974, "The 'Jupiter' Thermonuclear Reactor Based on Confinement of Plasma by Electrical and Magnetic Fields," Proceedings Joint USSR-USA Seminar on Systems Analysis and Construction of Thermonuclear Stations, (NII-EFA) (Leningrad, 9-20 December) (Leningrad: Efremov Institute of Electrophysical Instruments)
- ¹⁷⁹ Oleg A. Lavrent'ev; A. A. Kalmykov; A. V. Georgievskii; V. Ye Ziser; V. B. Yuferov; 1975, Izvest. Akad. Nauk Energetika i Transport 6, 54-9
- ¹⁸⁰ Thomas James Dolan; 1977, "Cost estimate of electrostatically plugged cusp reactor," Lawrence Livermore National Laboratory Report UCID-17568
- ¹⁸¹ T. H. Stix; 1969, Physics Review Letters 23, 1093
- ¹⁸² T. H. Stix; 1972, IEEE Transactions Nuclear Science 19, 150-5
- ¹⁸³ J. H. Nadler; George H. Miley; Y Gu; T Hochberg; 1992, Fusion Technology 21, 1639-43
- ¹⁸⁴ George H. Miley; J. Javedani; Y. Yamamoto; Richard Nebel; J. Nadler; Y. Gu; A Satsangi; P. Heck; 1993, "Inertial-electrostatic confinement neutron/proton source," Proceedings Third International Conference on Dense Z-Pinches, (London, 19-23 April) (New York: AIP)
- ¹⁸⁵ George H. Miley; A. J. Satsangi; Y. Yamamoto; H. Nakashima; J. B. Lavedani; 1993, "Conceptual design for a D-3He IEC pilot plant," Proceedings 15th IEEE Symposium on Fusion Engineering, (Hyannis, MA, 11-15 October) (Piscataway, NJ: IEEE)
- ¹⁸⁶ George H Miley; Y. Yamamoto; J. Javedani; Y. Gu; A. Satsangi; P. Heck, Richard Nebel; L. Turner; Robert W. Bussard; M. Ohnishi; K. Yoshikawa; H. Momota; Y. Tomita; 1993, "Hydrogen generation with an inertial electrostatic confinement power source," Proceedings First International Conference on New Energy Systems and Conversions, (Yokohama, Japan, 27-30 June)
- ¹⁸⁷ Robert W. Bussard; 1990, Jet Propulsion 6, 567
- ¹⁸⁸ George H. Miley; R. Burton; J. Javedani; Y. Yamamoto; A. Satsangi; Y. Gu; P. Heck; Richard Nebel; N. Schulze; J. Christensen; D. Strellis; J. DeMora; S. Cooper; A. Ochoa; J. Fluhrer; 1993, "Inertial electrostatic confinement as a power source for electric propulsion," Proceedings Vision 21 Conference, (Cleveland, OR, 30-31 March) (Washington DC: NASA)
- ¹⁸⁹ A. J. Satsangi; George H. Miley; J. B. Javedani; H. Nakashima; Y. Yamamoto; 1994, "Innovative technology for an inertial electrostatic confinement (IEC) fusion propulsion unit," Proceedings 11th Symposium on Space Nuclear Power and Propulsion. (Albuquerque, NM, 9-13 January) (New York: AIP)
- ¹⁹⁰ Robert W. Bussard; 1993, "The QED engine system: direct electric fusion-powered rocket propulsion systems." Proceedings 10th Symposium on Space Nuclear Power and Propulsion, (Albuquerque, NM, 10-14 January) (American Institute of Physics Publication 199) pp. 1601-12
- ¹⁹¹ Oleg A. Lavrent'ev; V. I. Karpukhin; V. I. Petrenko; N. N. Sappa; 1982, "Problems of Atomic Science and Technology," (Series Thermonuclear Fusion 2) pp 92-94

¹⁹² G. F. Abrashitov; A. V. Beloborodov; V. I. Volosov; V. V. Kubarev; Yu S. Popov; Yu N. Yudin; 1989, "Hot rotating plasma PSP-2 experiment," Report 89-109 (Novosibirsk Institute of Nuclear Physics)

¹⁹³ I. G. Brown; W. B. Kunkel; M. A. Levine; 1978, Nuclear Fusion 18, 761-8

¹⁹⁴ N. T. Gladd; Y. Goren; C. S. Liu; R. C. Davidson; 1977, Physics Fluids, 20, 1876-9

¹⁹⁵ G. J. Butterworth; 1992, Fusion Technology 21, 1994-2000